Lecture 10

Detectors and descriptors

- Properties of detectors
  - Edge detectors
  - Harris
  - DoG
- Properties of descriptors
  - SIFT
  - HOG
  - Shape context

From the 3D to 2D & vice versa

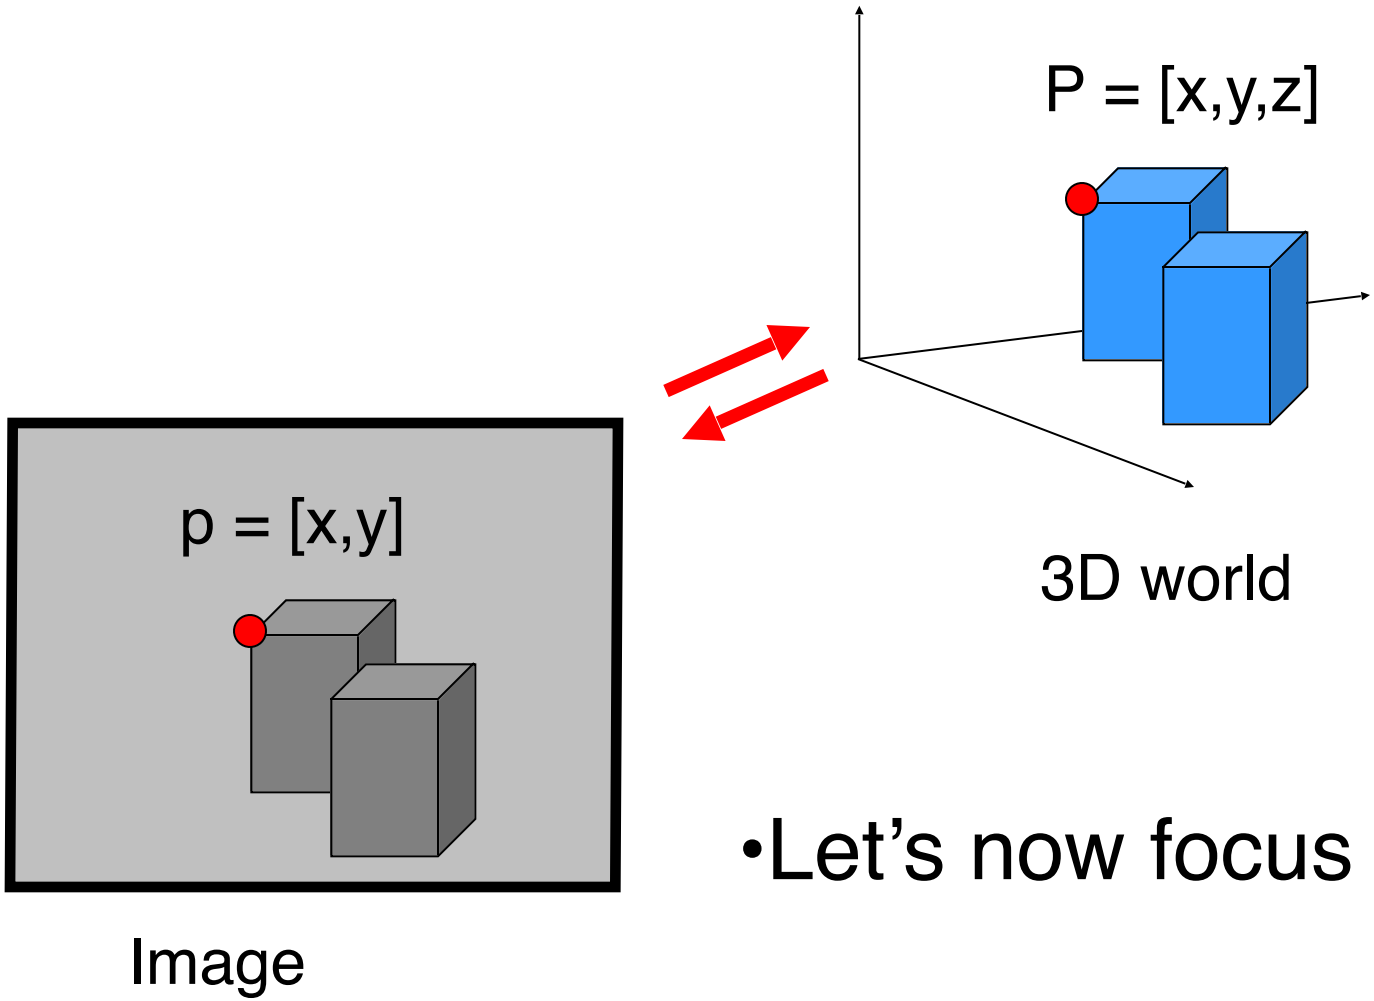

- Let’s now focus on 2D

How to represent images?

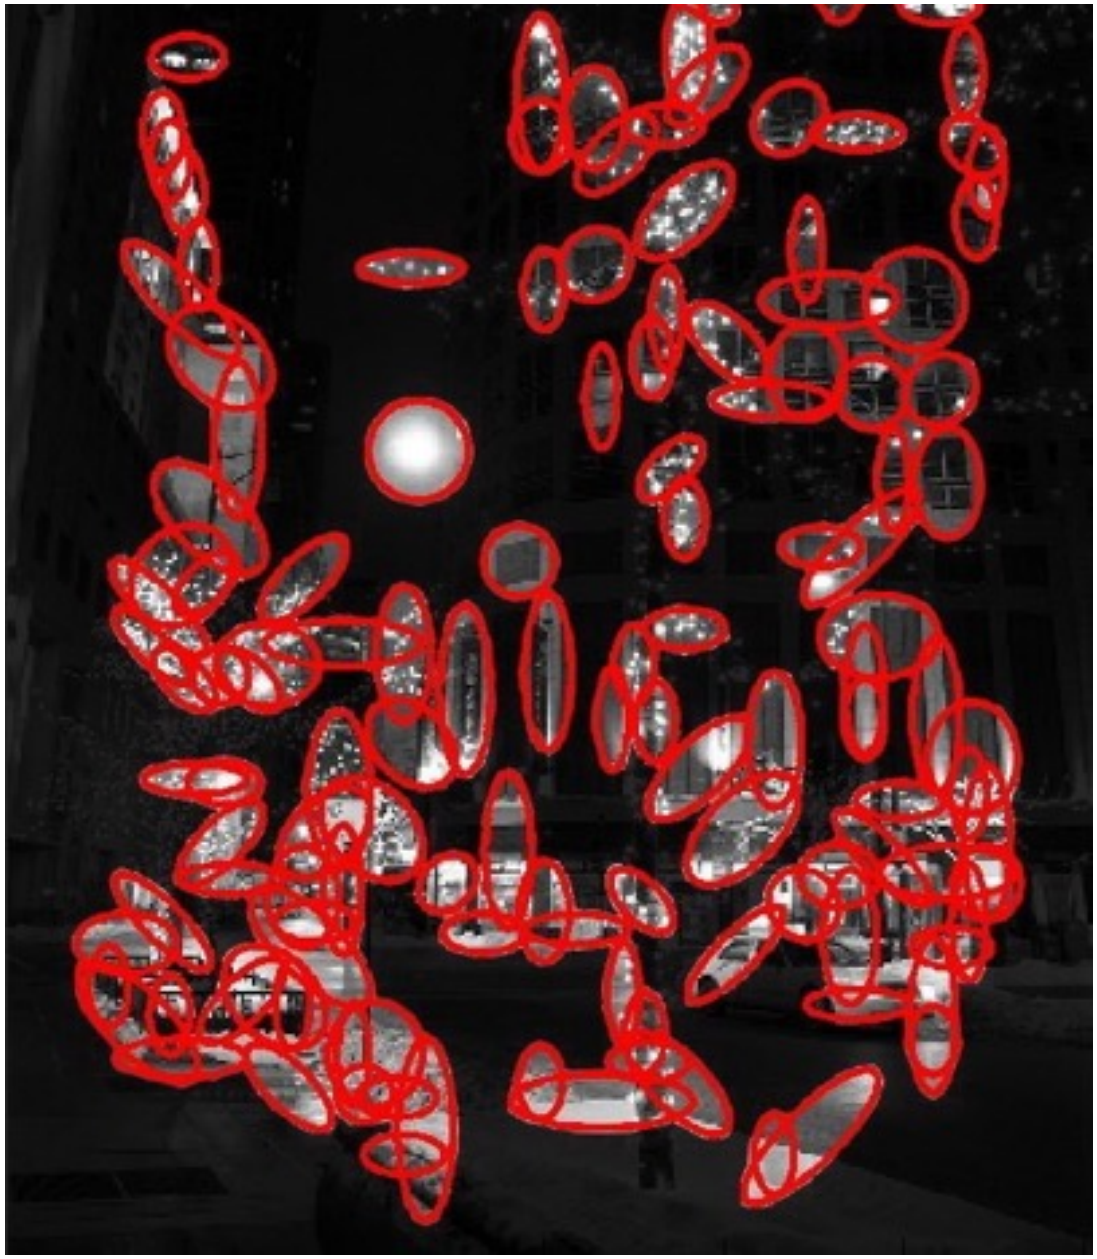

The big picture…

Feature Detection

e.g. DoG

Feature Description

e.g. SIFT

- Estimation
- Matching
- Indexing
- Detection

Estimation

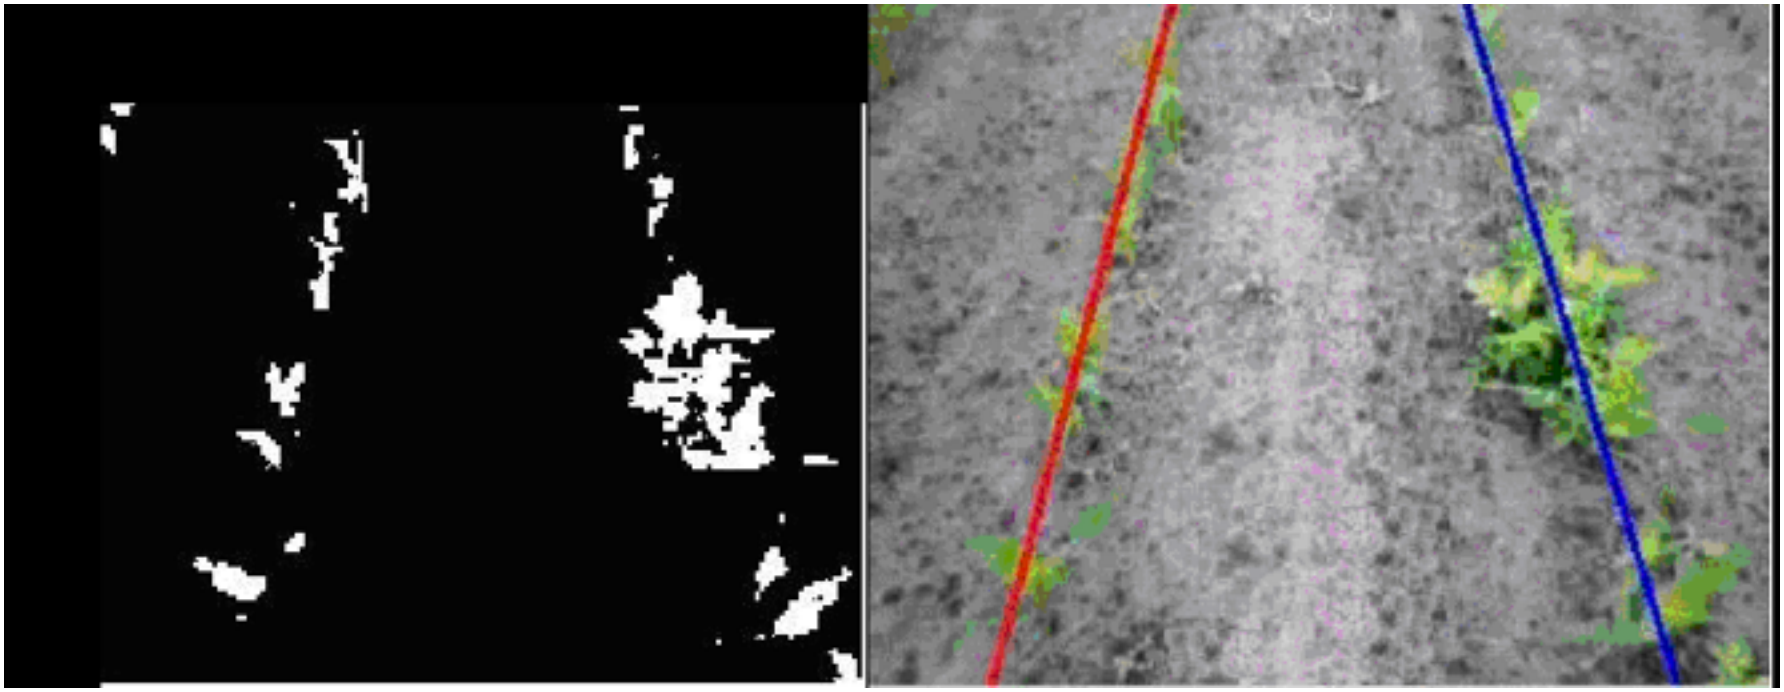

Courtesy of TKK Automation Technology Laboratory

Estimation

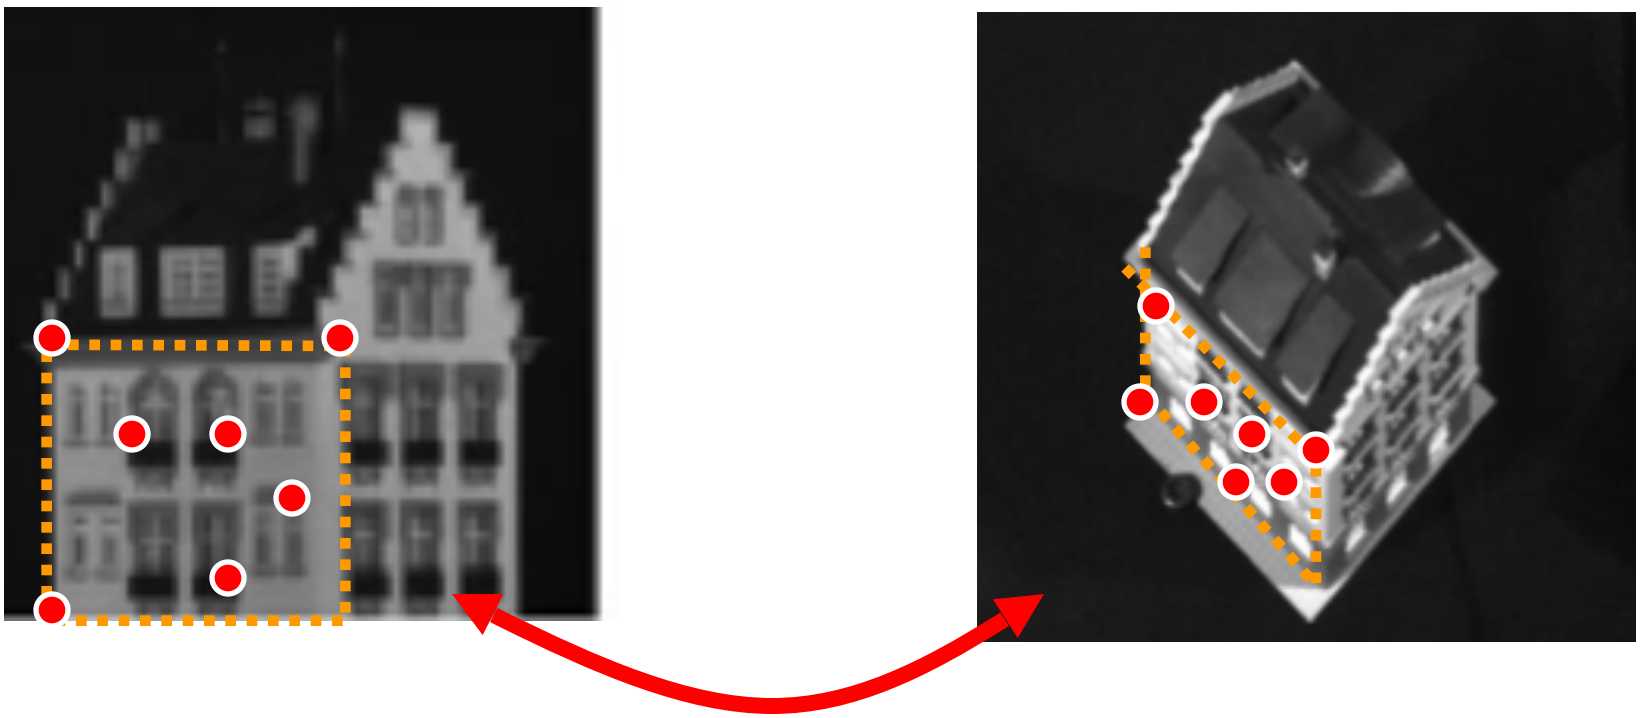

Estimation

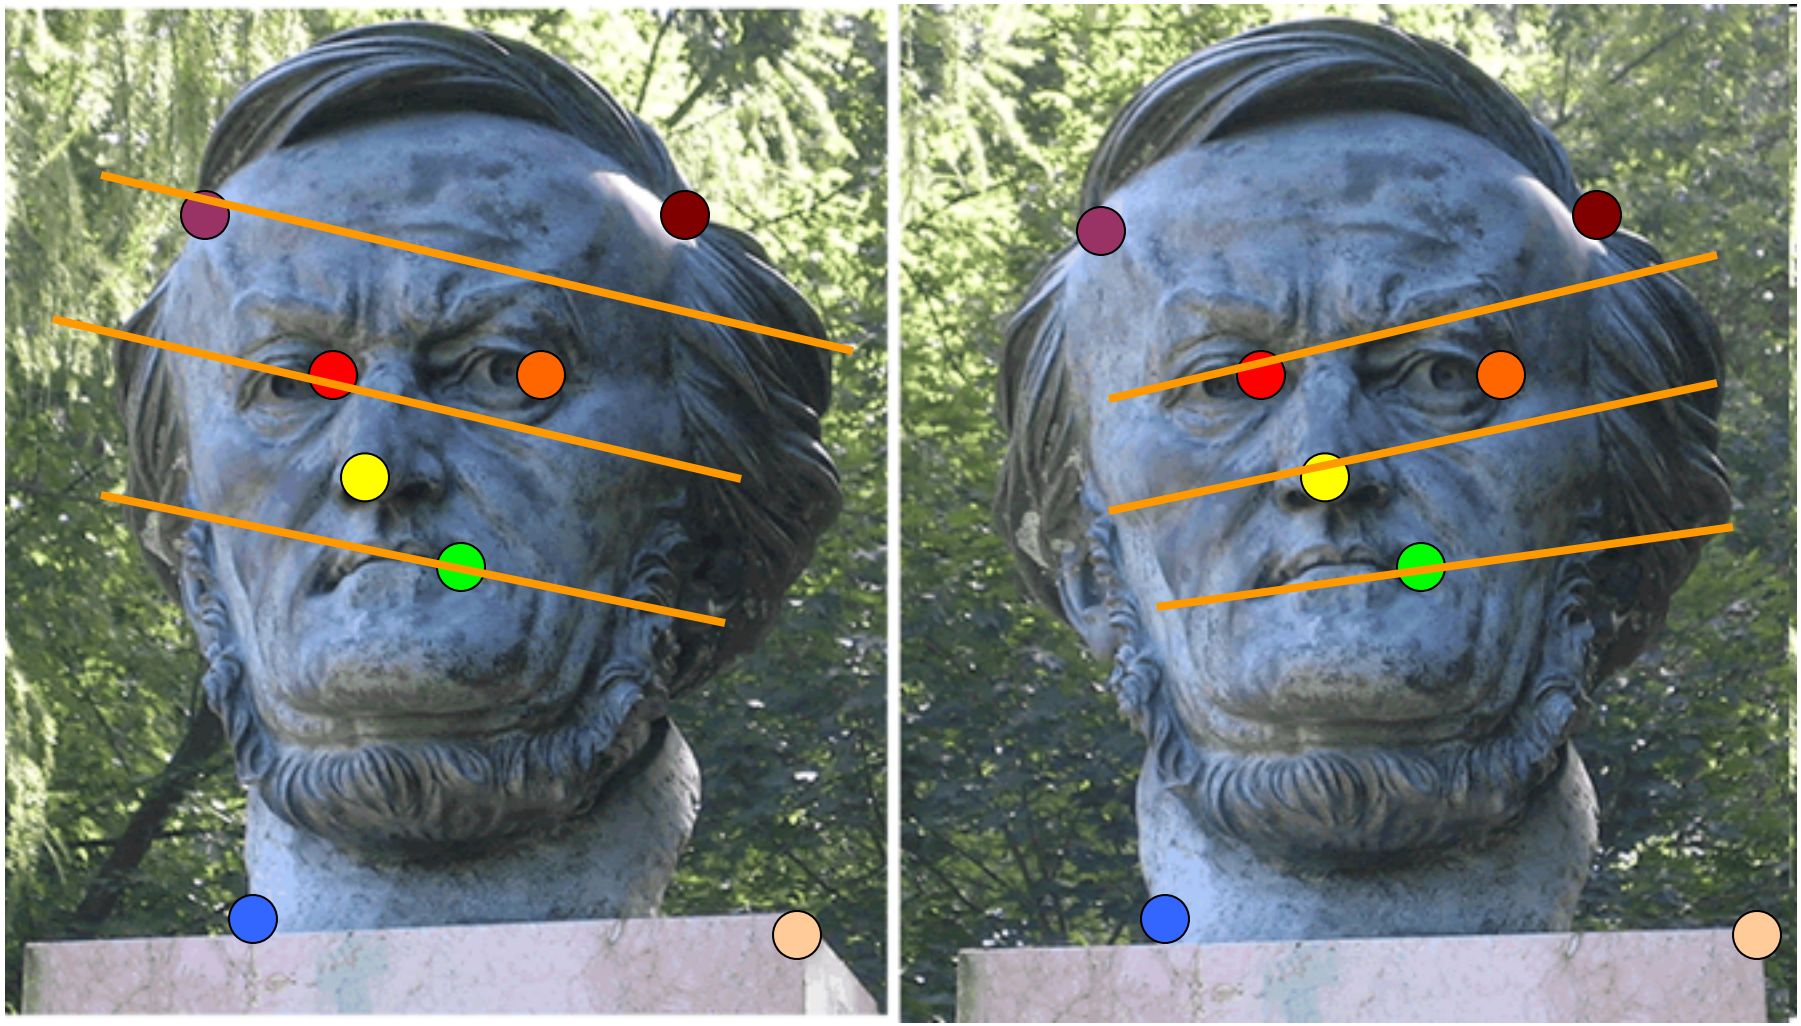

Matching

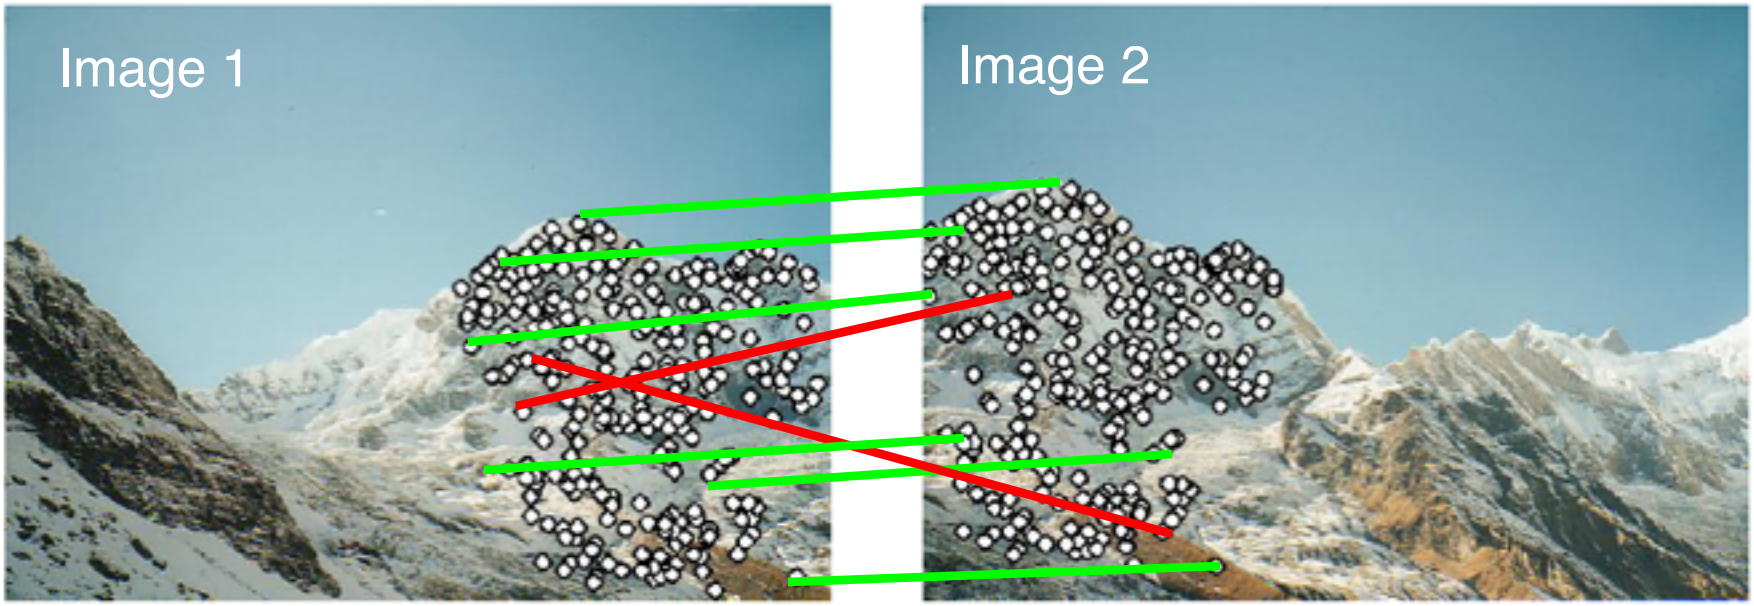

Object modeling and detection

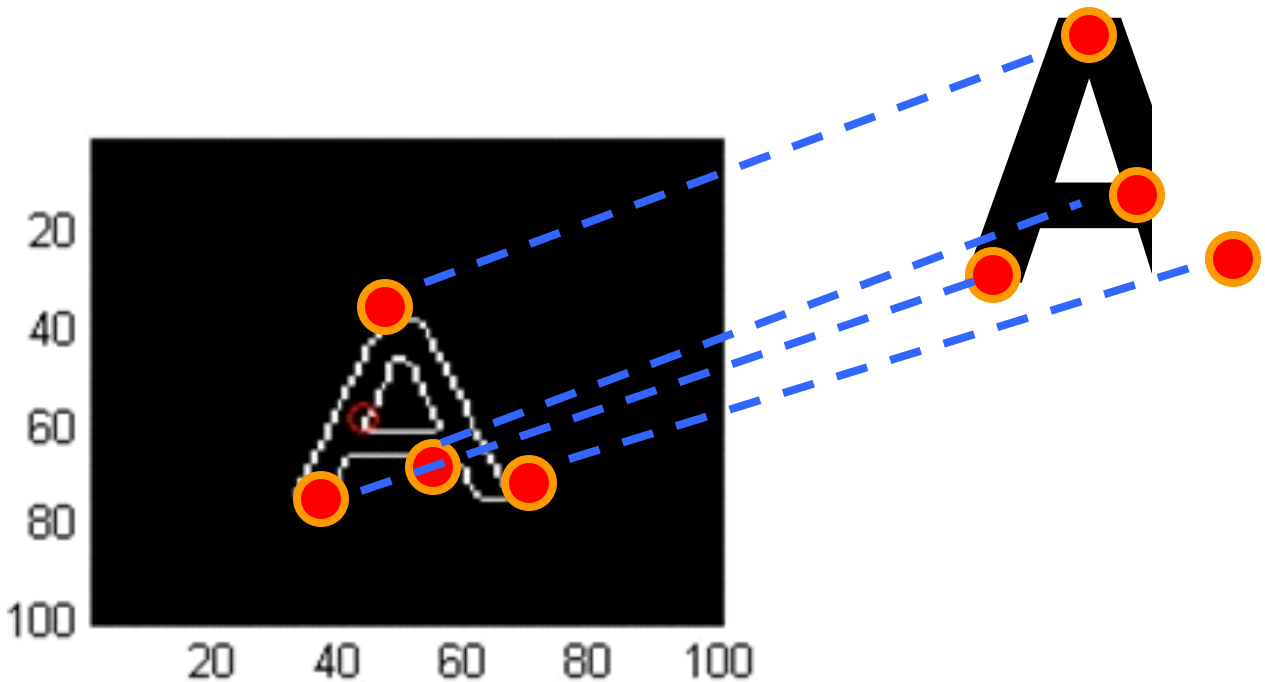

Lecture 10

Detectors and descriptors

- Properties of detectors
  - Edge detectors
  - Harris
  - DoG
- Properties of descriptors
  - SIFT
  - HOG
  - Shape context

Edge detection

What causes an edge?

Identifies sudden changes in an image

- Depth discontinuity
- Surface orientation discontinuity
- Reflectance discontinuity (i.e., change in surface material properties)
- Illumination discontinuity (e.g., highlights; shadows)

Edge Detection

- Criteria for optimal edge detection (Canny 86):
  - Good detection accuracy:
    - minimize the probability of false positives (detecting spurious edges caused by noise),
    - false negatives (missing real edges)
  - Good localization:
    - edges must be detected as close as possible to the true edges.
  - Single response constraint:
    - minimize the number of local maxima around the true edge (i.e. detector must return single point for each true edge point)

Edge Detection

- Examples:

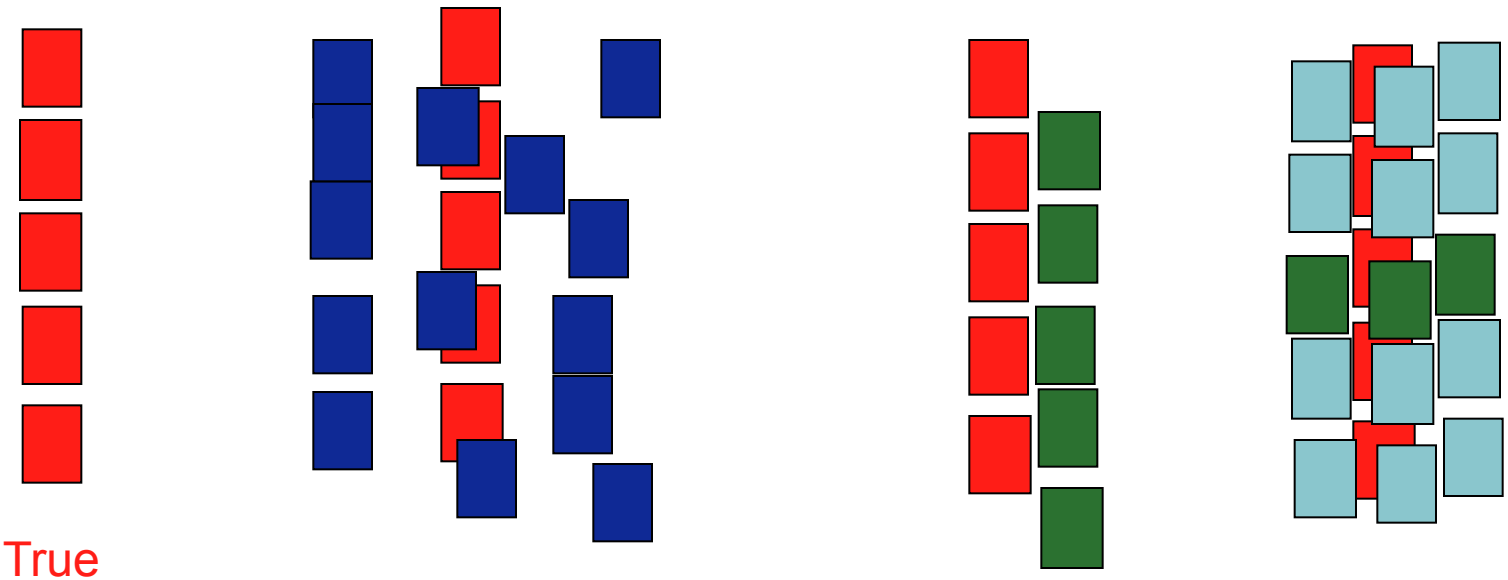

True edge

Poor robustness to noise

Poor localization

Too many responses

Designing an edge detector

- **Two ingredients:**
- Use derivatives (in x and y direction) to define a location with high gradient .
- Need smoothing to reduce noise prior to taking derivative

Designing an edge detector

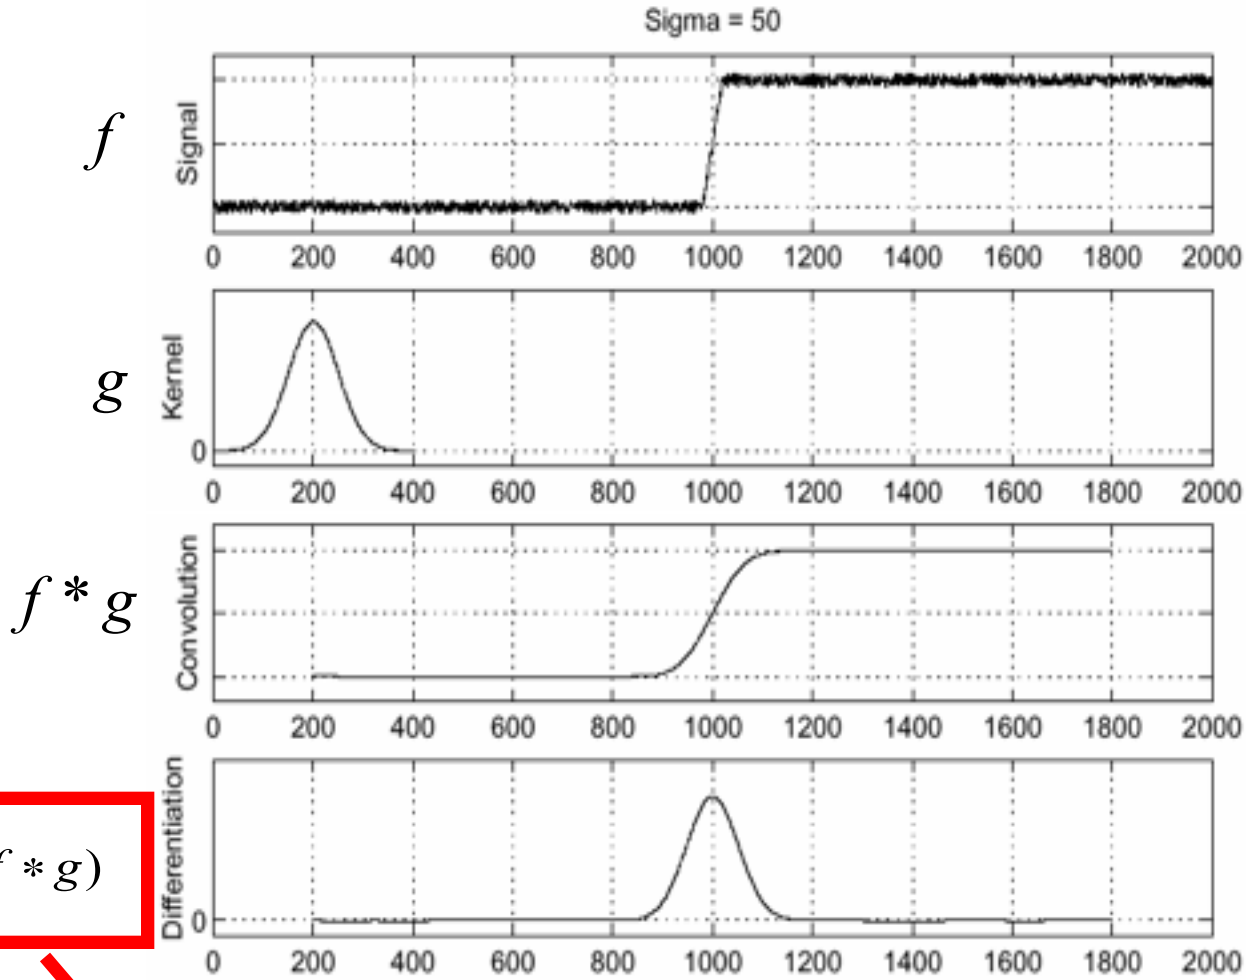

$$\boxed{\frac{d}{dx}(f * g)}$$

[Eq. 1]

$$= \frac{dg}{dx} * f$$ = "derivative of Gaussian" filter

[Eq. 2]

Source: S. Seitz

Edge detector in 2D

- Smoothing

$$I' = g(x, y) * I$$ [Eq. 3]

$$g(x, y) = \frac{1}{2\pi\sigma^2} e^{-\frac{x^2+y^2}{2\sigma^2}}$$ [Eq. 4]

- Derivative

$$S = \nabla(g * I) = (\nabla g) * I =$$

$$\nabla g = \begin{bmatrix} \frac{\partial g}{\partial x} \\ \frac{\partial g}{\partial y} \end{bmatrix} = \begin{bmatrix} g_x \\ g_y \end{bmatrix}$$

[Eq. 6]

$$= \begin{bmatrix} g_x \\ g_y \end{bmatrix} * I = \begin{bmatrix} g_x * I \\ g_y * I \end{bmatrix} = \begin{bmatrix} S_x & S_y \end{bmatrix}$$ = gradient vector

[Eq. 5]

Canny Edge Detection (Canny 86):

See CS131A for details

original

Canny with $\sigma = 1$

Canny with $\sigma = 2$

- The choice of σ depends on desired behavior
  - large σ detects large scale edges
  - small σ detects fine features

Other edge detectors:

- Sobel
- Canny-Deriche
- Differential

Corner/blob detectors

Corner/blob detectors

- Repeatability
  - The same feature can be found in several images despite geometric and photometric transformations
- Saliency
  - Each feature is found at an “interesting” region of the image
- Locality
  - A feature occupies a “relatively small” area of the image;

Repeatability

Illumination invariance

Scale invariance

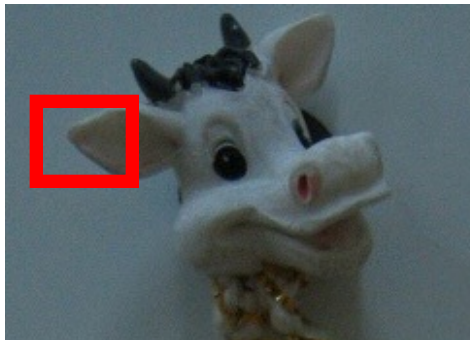

Pose invariance

- Rotation
- Affine

- Saliency

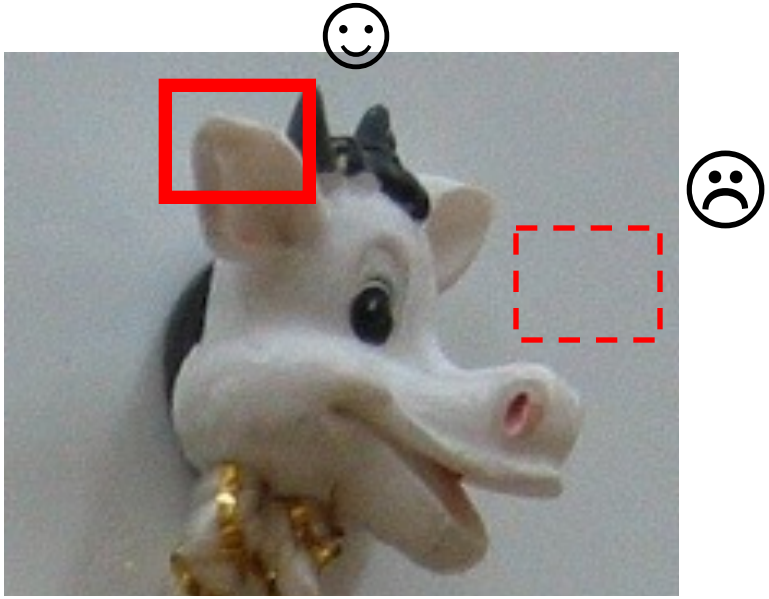

- Locality

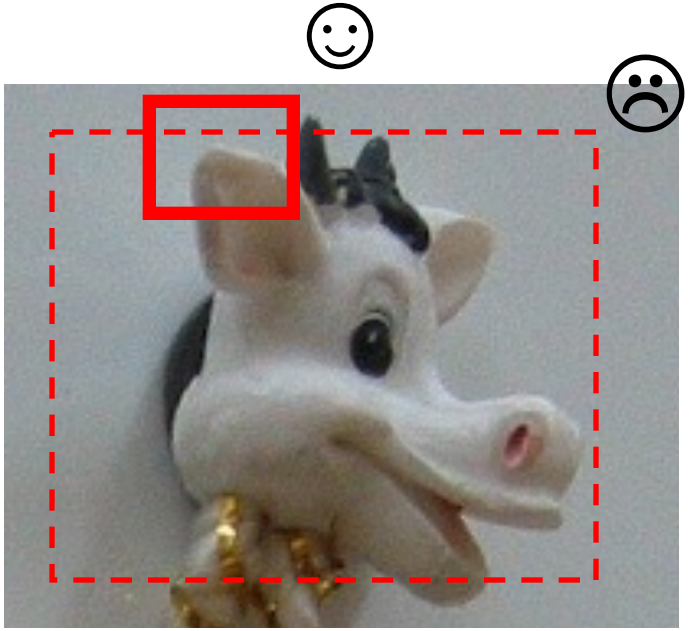

Corners detectors

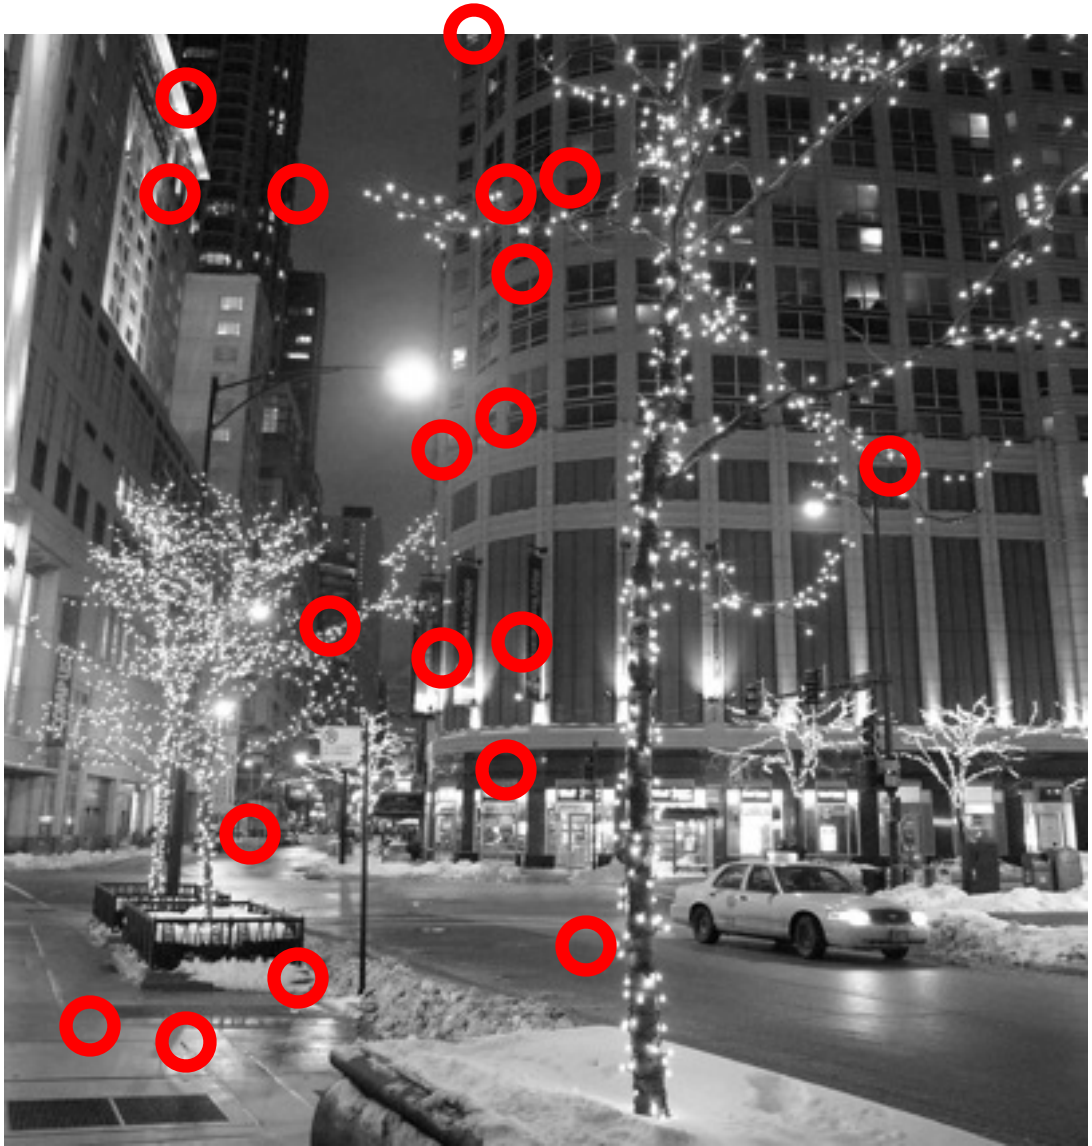

Harris corner detector

C.Harris and M.Stephens. "A Combined Corner and Edge Detector." *Proceedings of the 4th Alvey Vision Conference*: pages 147--151.

See CS131A for details

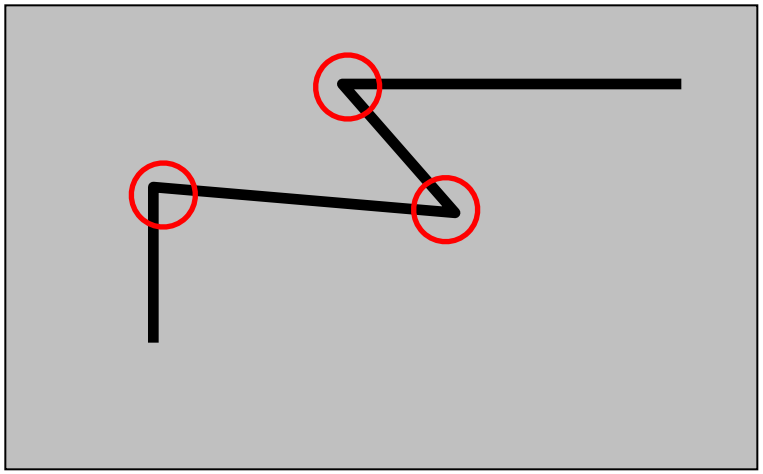

Harris Detector: Basic Idea

Explore intensity changes within a window as the window changes location

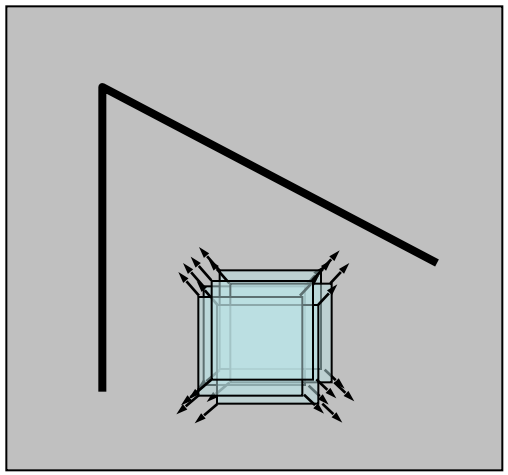

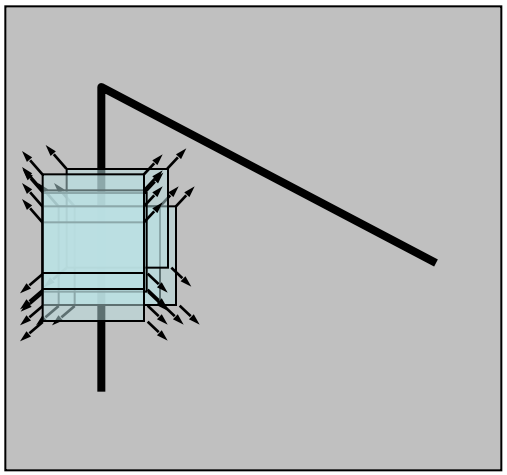

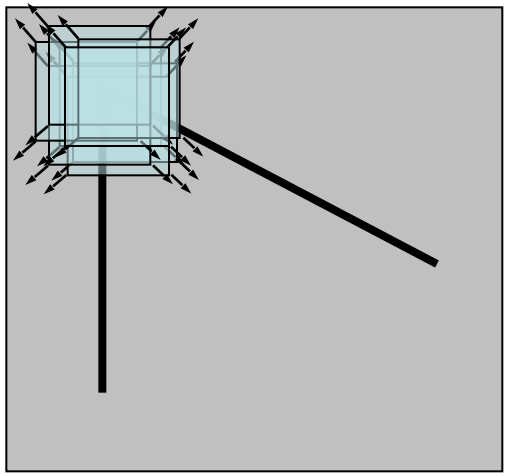

"flat" region:
no change in all directions

"edge":
no change along the edge direction

"corner":
significant change in all directions

Results

Blob detectors

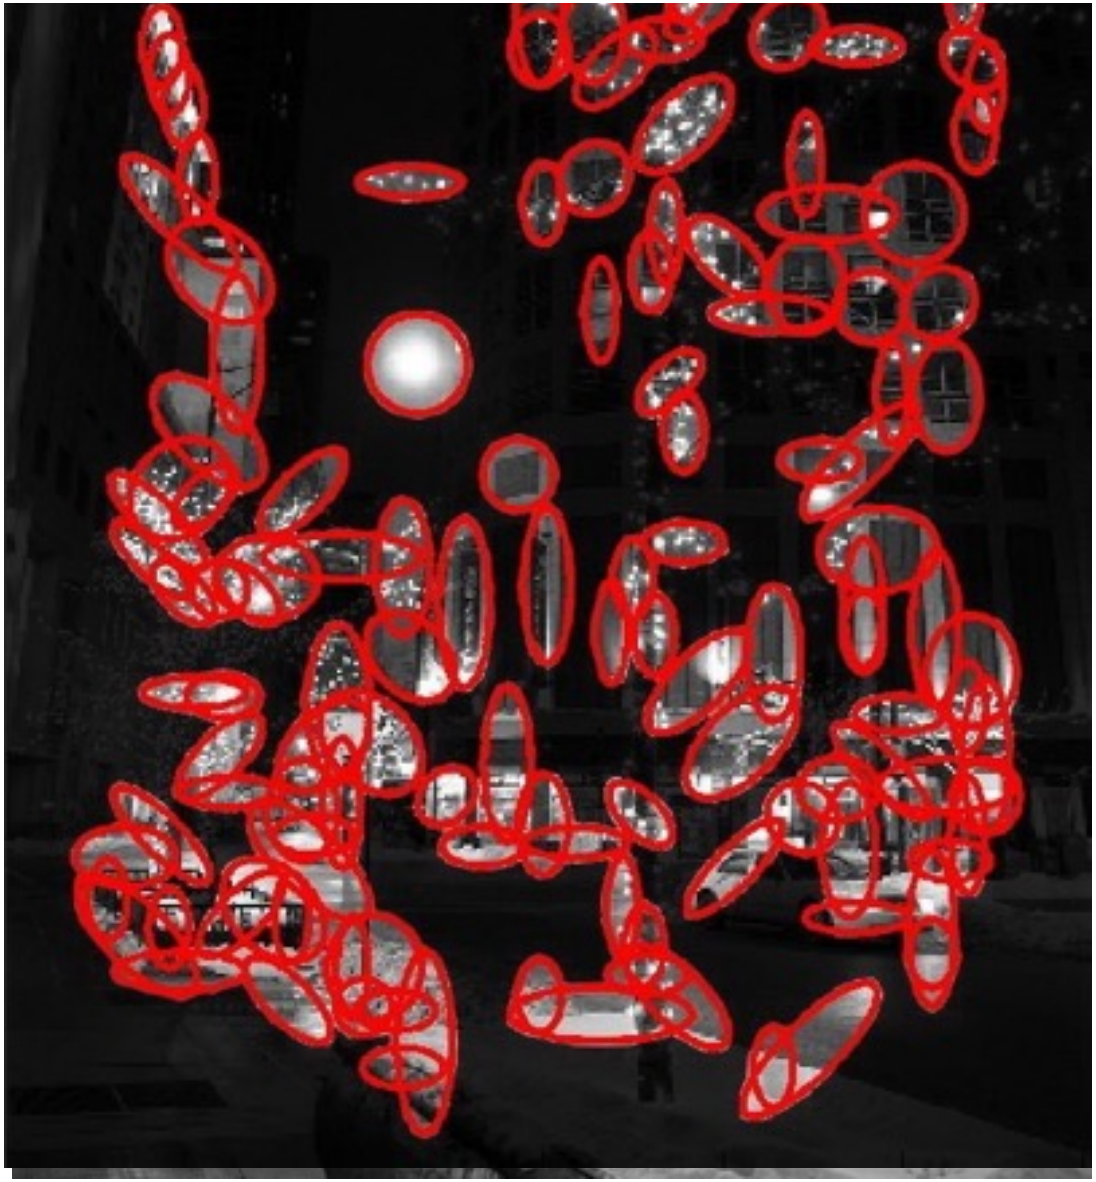

Edge detection

f

g

$f * g$

$\frac{d}{dx}(f * g)$

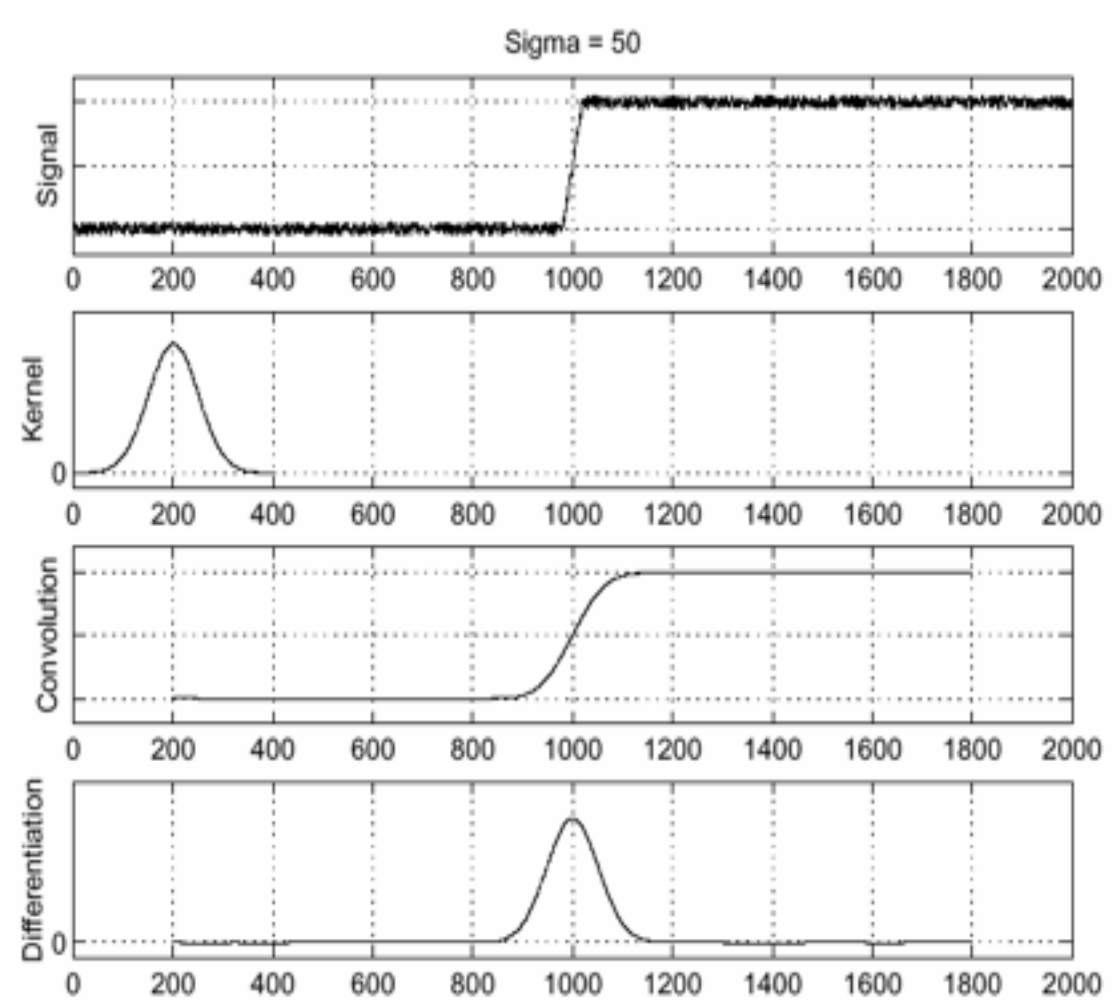

Source: S. Seitz

Edge detection

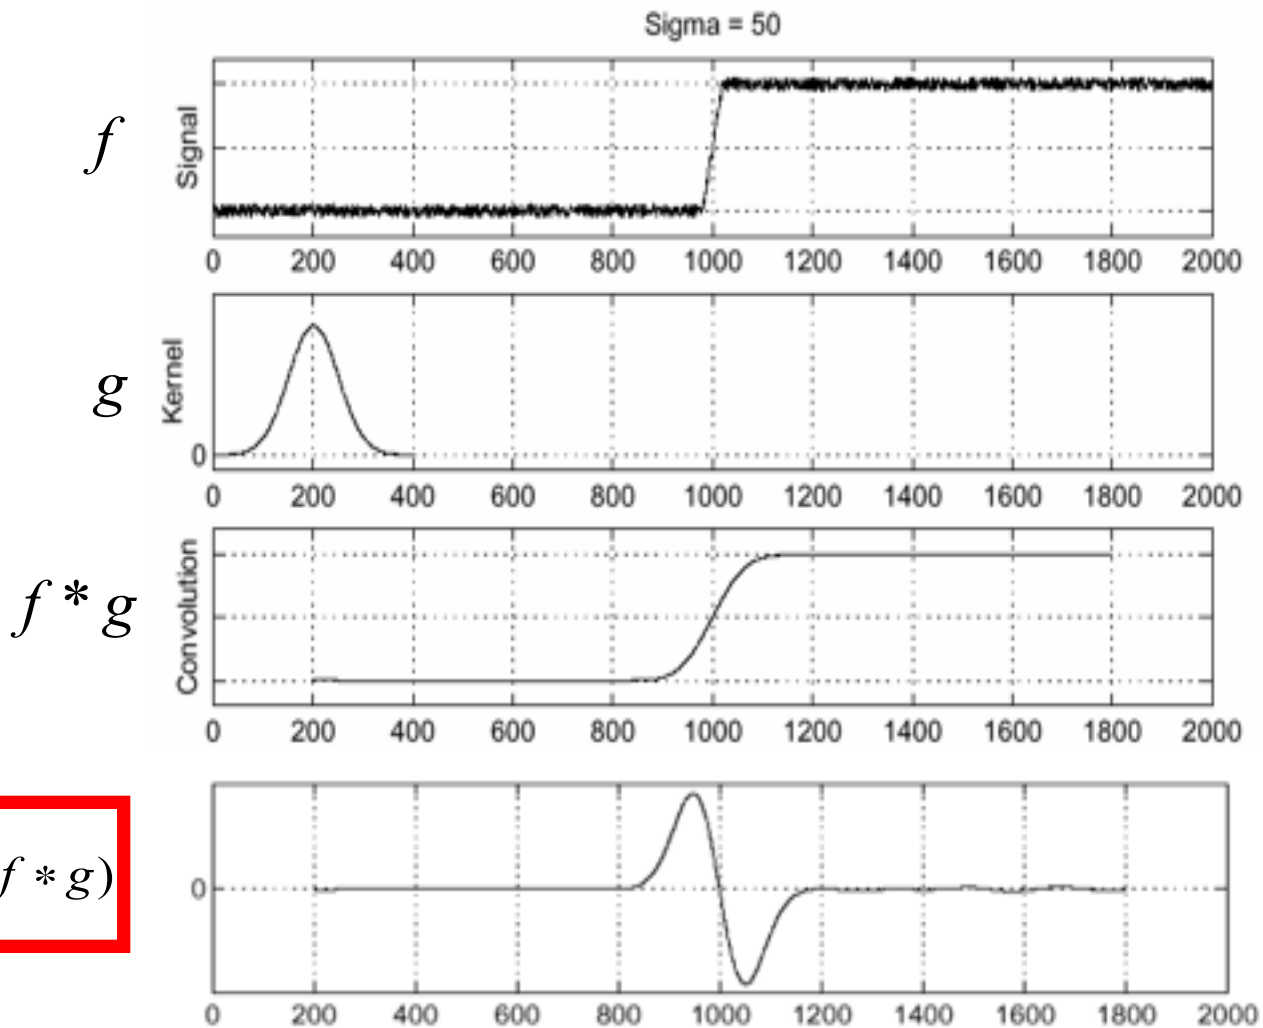

[Eq. 7]

$$\boxed{\frac{d^2}{dx^2}(f * g)}$$

[Eq. 8] $f * \frac{d^2}{dx^2} g$ = “second derivative of Gaussian” filter = Laplacian of the gaussian

Edge detection as zero crossing

f

$$\frac{d^2}{dx^2} g$$

$$f * \frac{d^2}{dx^2} g$$

[Eq. 8]

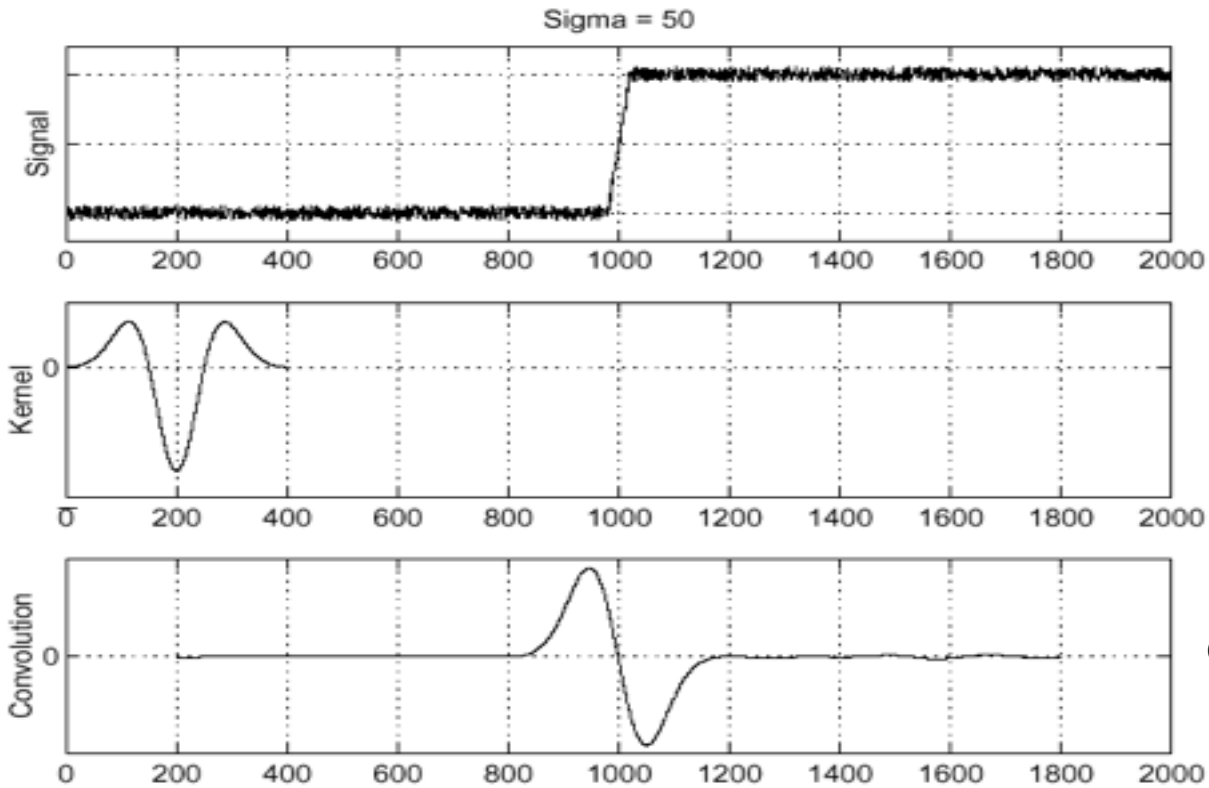

Edge

Laplacian

Edge = zero crossing of second derivative

Edge detection as zero crossing

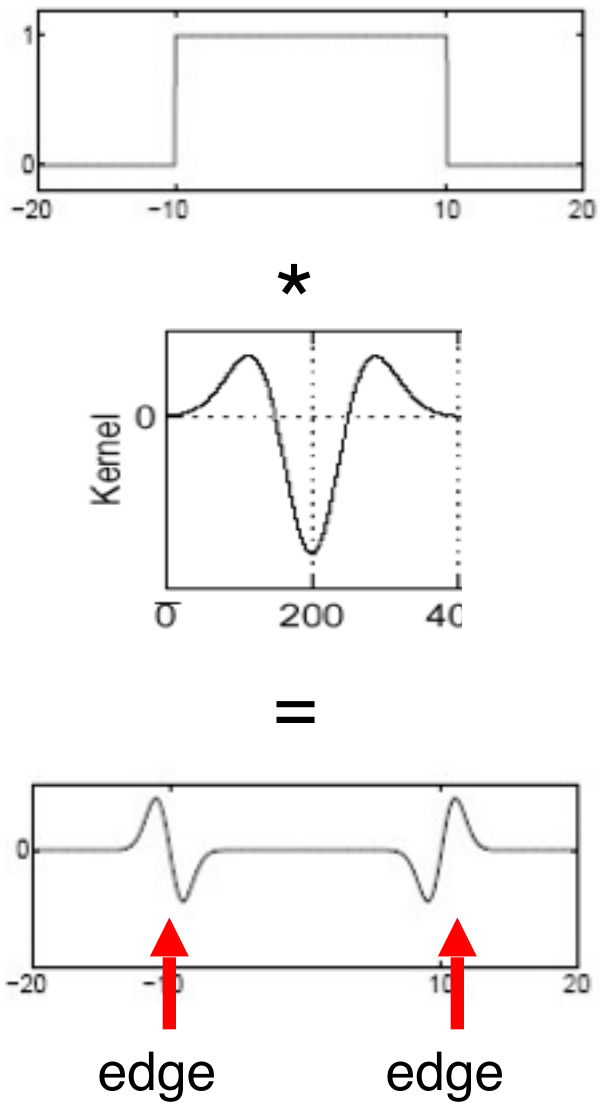

From edges to blobs

- Can we use the laplacian to find a blob (RECT function)?

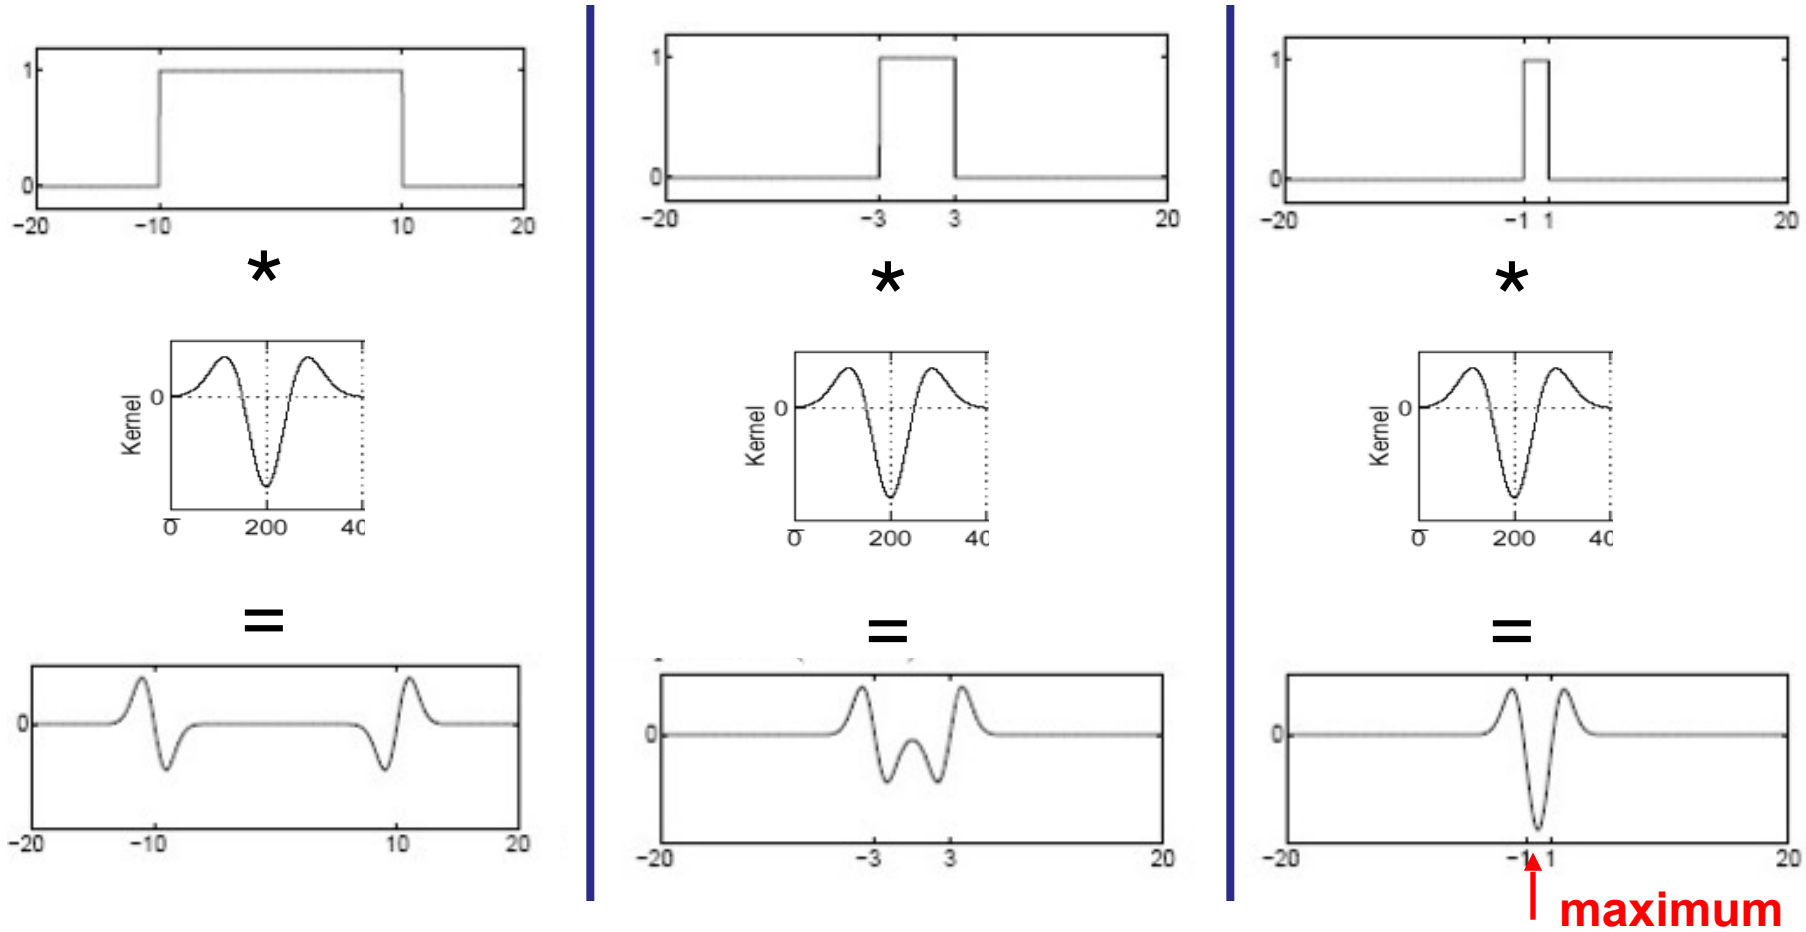

Magnitude of the Laplacian response achieves a maximum at the center of the blob, provided the scale of the Laplacian is “matched” to the scale of the blob

From edges to blobs

- Can we use the laplacian to find a blob (RECT function)?

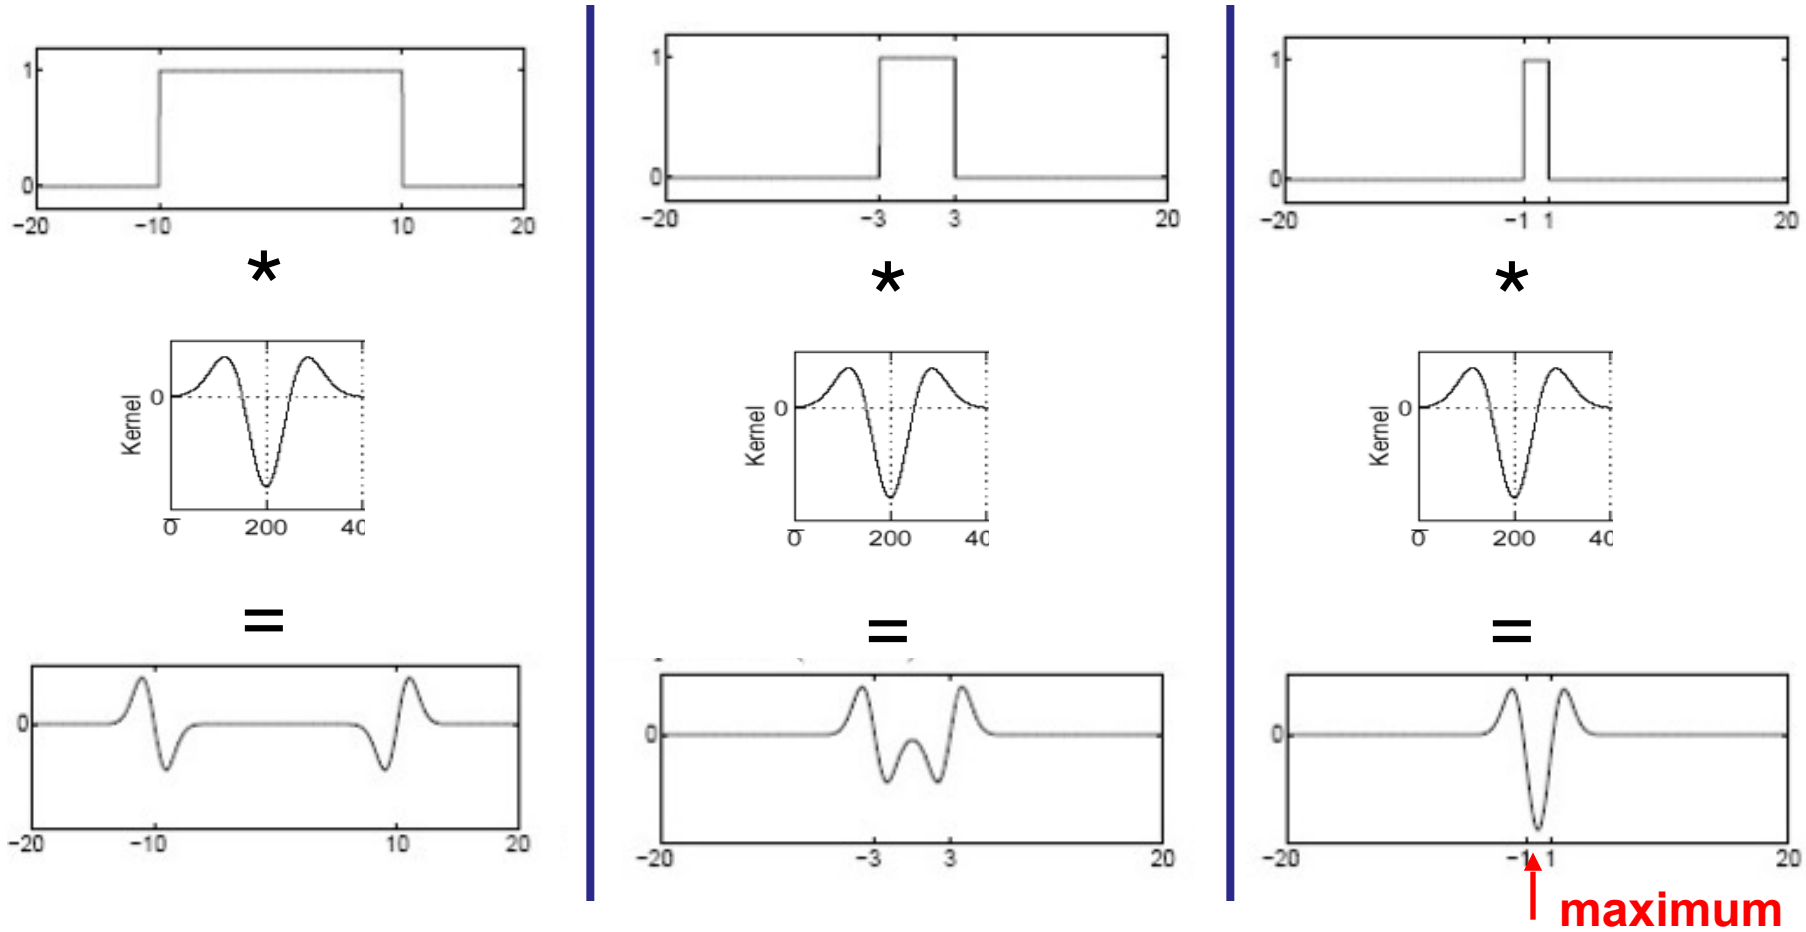

What if the blob is slightly thicker or slimmer?

Scale selection

Convolve signal with Laplacians at several sizes and looking for the maximum response

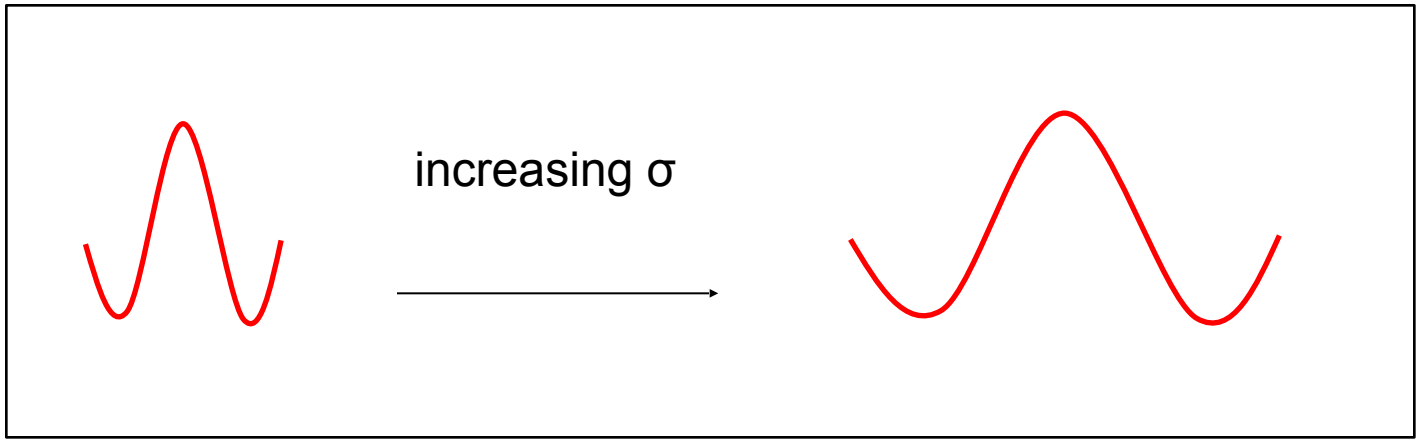

Scale normalization

- To keep the energy of the response the same, must multiply Gaussian derivative by σ
- Laplacian is the second Gaussian derivative, so it must be multiplied by σ^2





Normalized Laplacian

$$g(x) = \frac{1}{\sqrt{2\pi}\,\sigma} e^{-\frac{x^2}{2\sigma^2}}$$

$$\sigma^2 \frac{d^2}{dx^2} g$$

Characteristic scale

We define the characteristic scale as the scale that produces peak of Laplacian response

Original signal

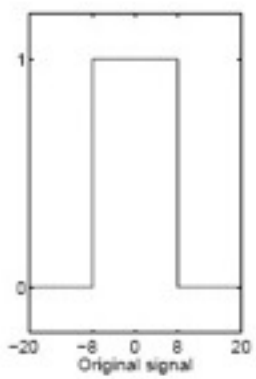

Scale-normalized Laplacian response

σ = 1 σ = 2 σ = 4 σ = 8 σ = 16

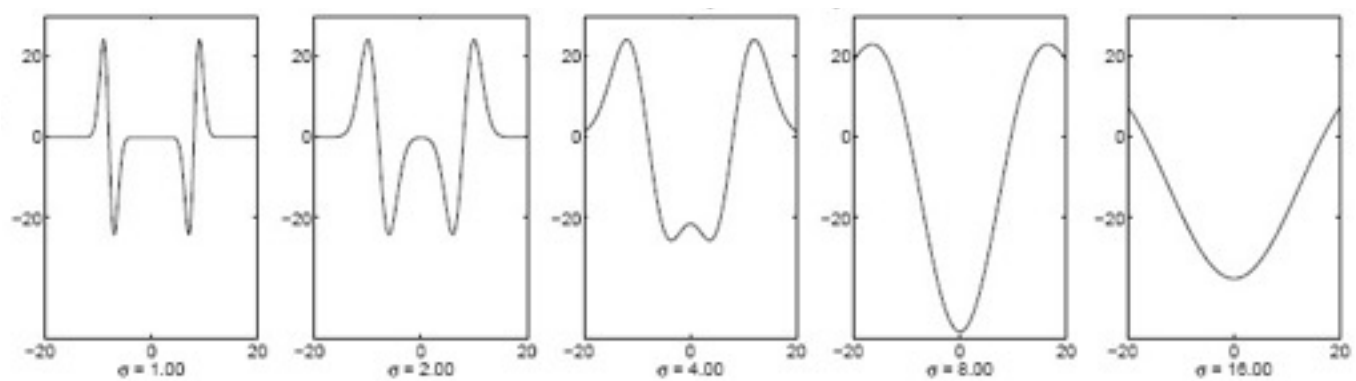

Maximum ☺

T. Lindeberg (1998). "Feature detection with automatic scale selection." *International Journal of Computer Vision* **30** (2): pp 77--116.

Characteristic scale

Here is what happens if we don't normalize the Laplacian:

Original signal

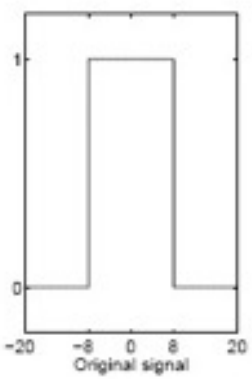

σ = 1 σ = 2 σ = 4 σ = 8 σ = 16

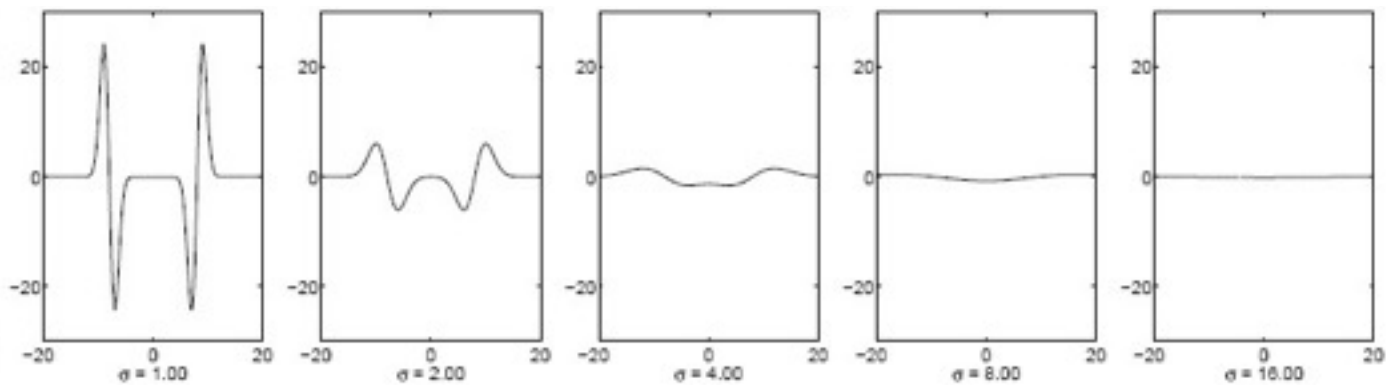

This should give the max response ☹

Blob detection in 2D

- Laplacian of Gaussian: Circularly symmetric operator for blob detection in 2D

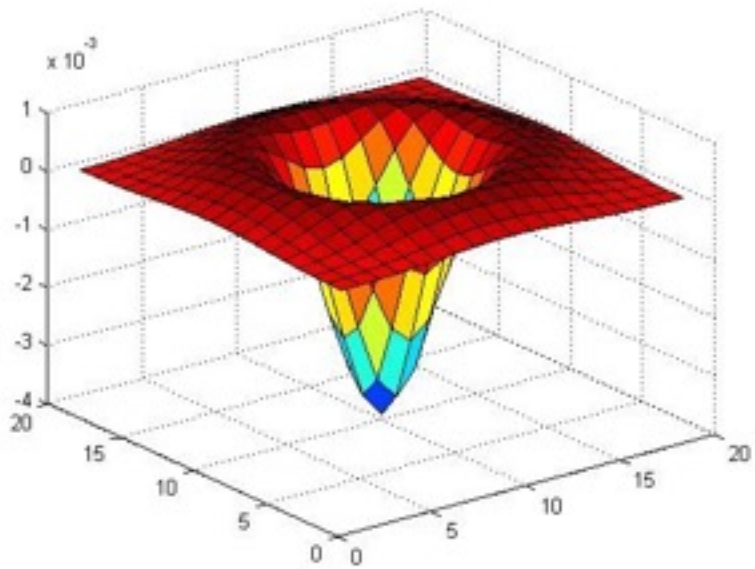

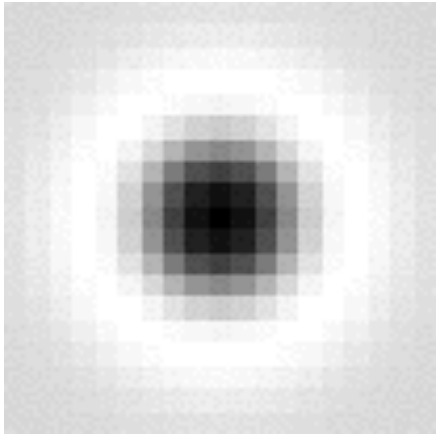

[Eq. 9]

Scale-normalized: $$\nabla^2_{\text{norm}} g = \sigma^2 \left(\frac{\partial^2 g}{\partial x^2} + \frac{\partial^2 g}{\partial y^2} \right)$$

Scale selection

- For a binary circle of radius r, the Laplacian achieves a maximum at

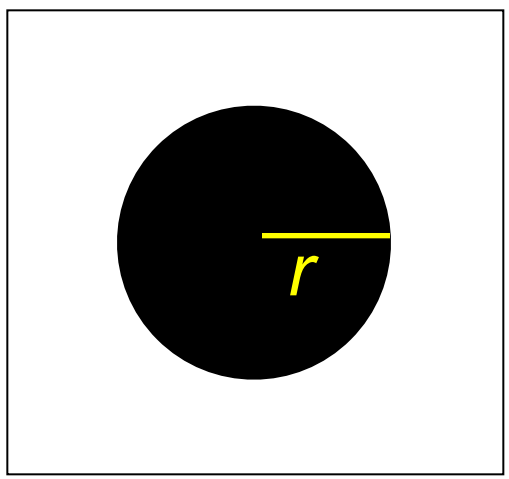

image

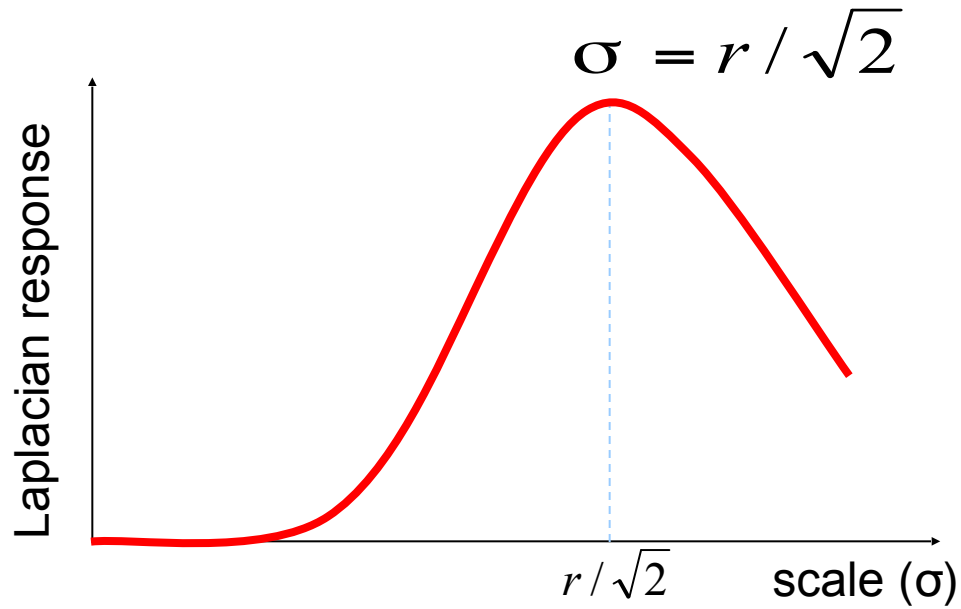

Scale-space blob detector

1. Convolve image with scale-normalized Laplacian at several scales

2. Find maxima of squared Laplacian response in scale-space

The maxima indicate that a blob has been detected and what's its intrinsic scale

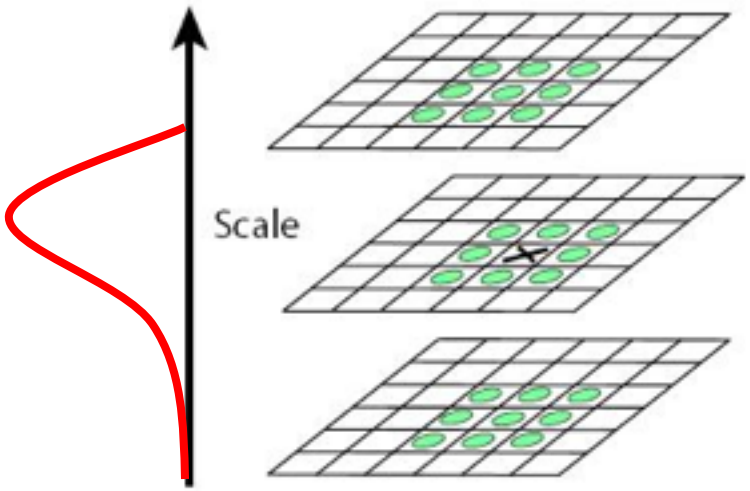

Scale-space blob detector: Example

Scale-space blob detector: Example

sigma = 11.9912

Scale-space blob detector: Example

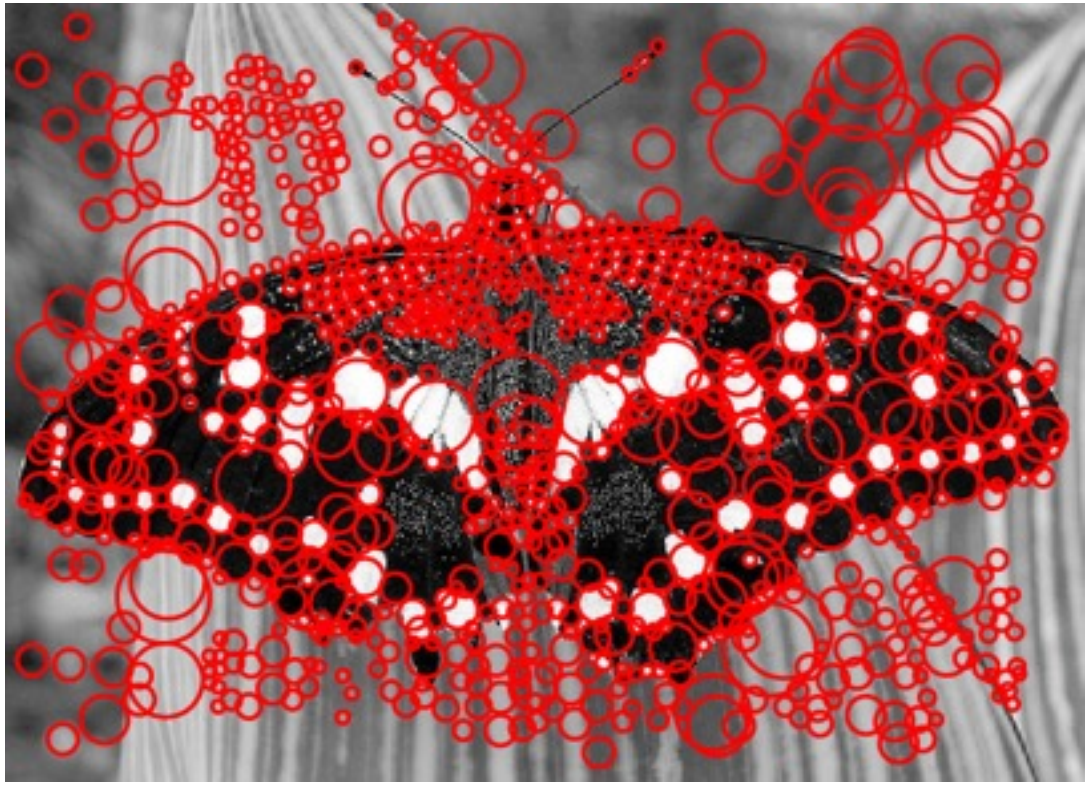

Difference of Gaussians (DoG)

David G. Lowe. **"Distinctive image features from scale-invariant keypoints."** *IJCV* 60 (2), 04

- Approximating the Laplacian with a difference of Gaussians:

$$L = \sigma^2 \left(G_{xx}(x, y, \sigma) + G_{yy}(x, y, \sigma) \right)$$

(Laplacian) [Eq. 10]

$$DoG = G(x, y, 2\sigma) - G(x, y, \sigma)$$

[Eq. 11]

Difference of gaussian with scales 2 σ and σ

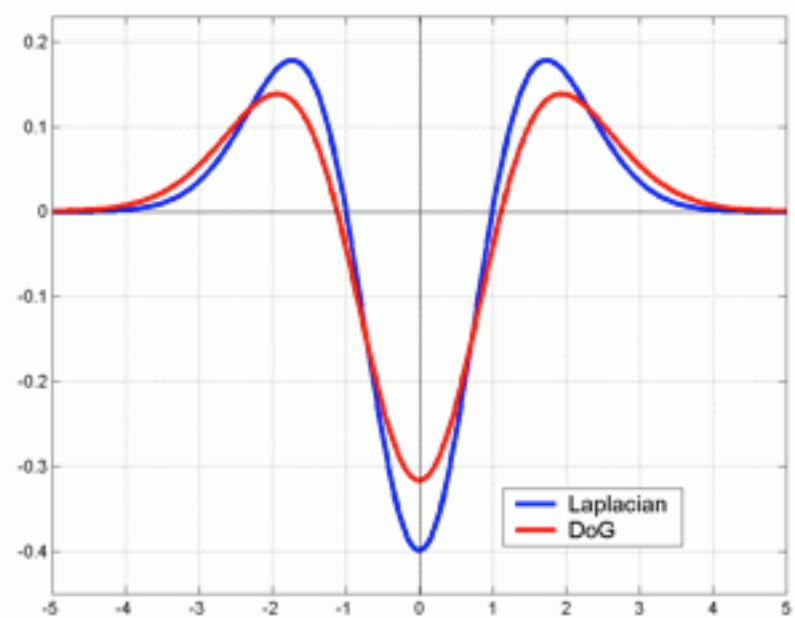

In general:

$$DoG = G(x, y, k\sigma) - G(x, y, \sigma) \approx (k-1)\sigma^2 \mathbf{L}$$ [Eq. 12]

Affine invariant detectors

K. Mikolajczyk and C. Schmid, Scale and Affine invariant interest point detectors, IJCV 60(1):63-86, 2004.

Similarly to characteristic scale, we can define the characteristic shape of a blob

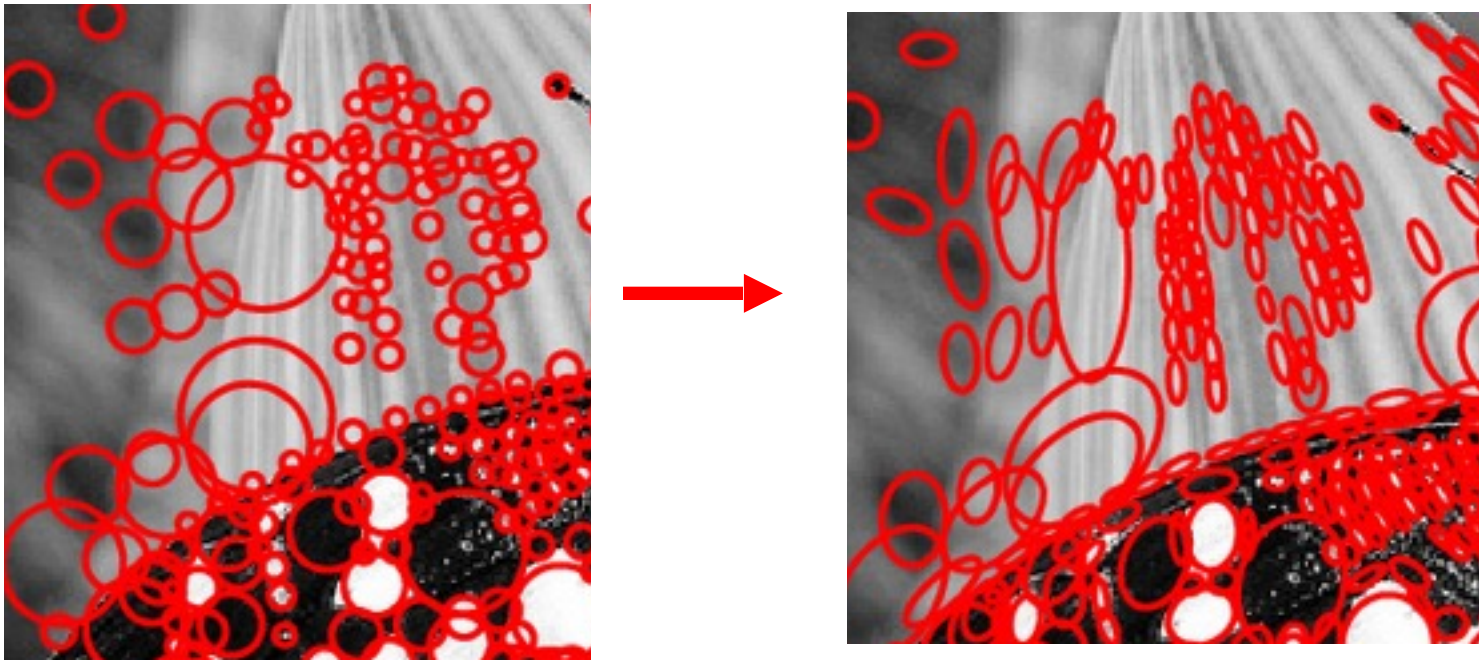

Properties of detectors

Detector	Illumination	Rotation	Scale	View point
Lowe '99 (DoG)	Yes	Yes	Yes	No

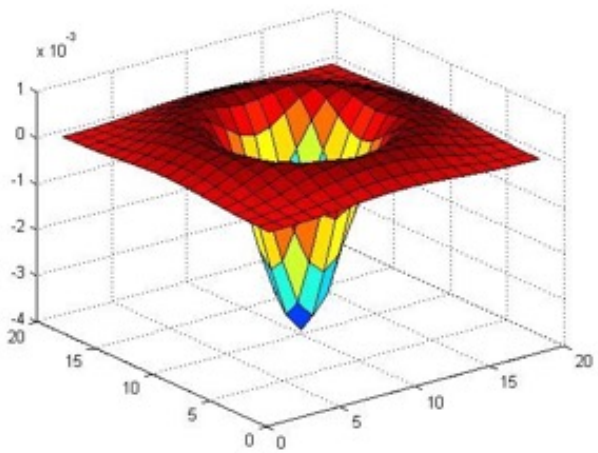

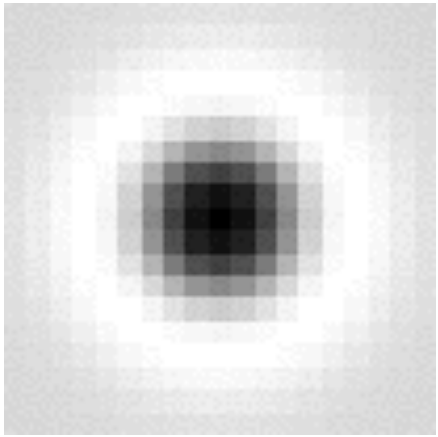

Scale-normalized: $\nabla^2_{\text{norm}} g = \sigma^2 \left(\frac{\partial^2 g}{\partial x^2} + \frac{\partial^2 g}{\partial y^2} \right)$

Properties of detectors

Detector	Illumination	Rotation	Scale	View point
Lowe ’99 (DoG)	Yes	Yes	Yes	No
Harris corner	Yes	Yes	No	No
Mikolajczyk & Schmid ’01, ‘02	Yes	Yes	Yes	Yes
Tuytelaars, ‘00	Yes	Yes	No (Yes ’04)	Yes
Kadir & Brady, 01	Yes	Yes	Yes	no
Matas, ’02	Yes	Yes	Yes	no

Lecture 10

Detectors and descriptors

- Properties of detectors
  - Edge detectors
  - Harris
  - DoG
- Properties of descriptors
  - SIFT
  - HOG
  - Shape context

The big picture…

Feature Detection

e.g. DoG

Feature Description

e.g. SIFT

- Estimation
- Matching
- Indexing
- Detection

Properties

Depending on the application a descriptor must incorporate information that is:

- Invariant w.r.t:
  - Illumination
  - Pose
  - Scale
  - Intraclass variability

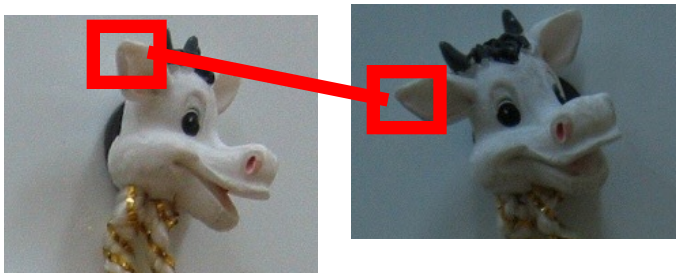

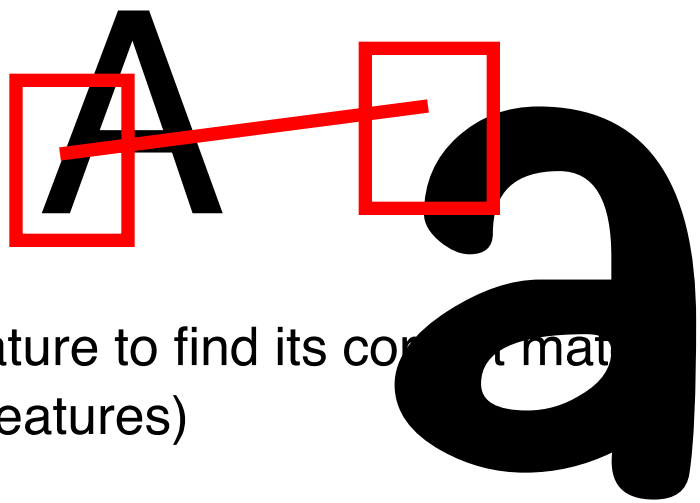

- Highly distinctive (allows a single feature to find its correct match with good probability in a large database of features)

The simplest descriptor

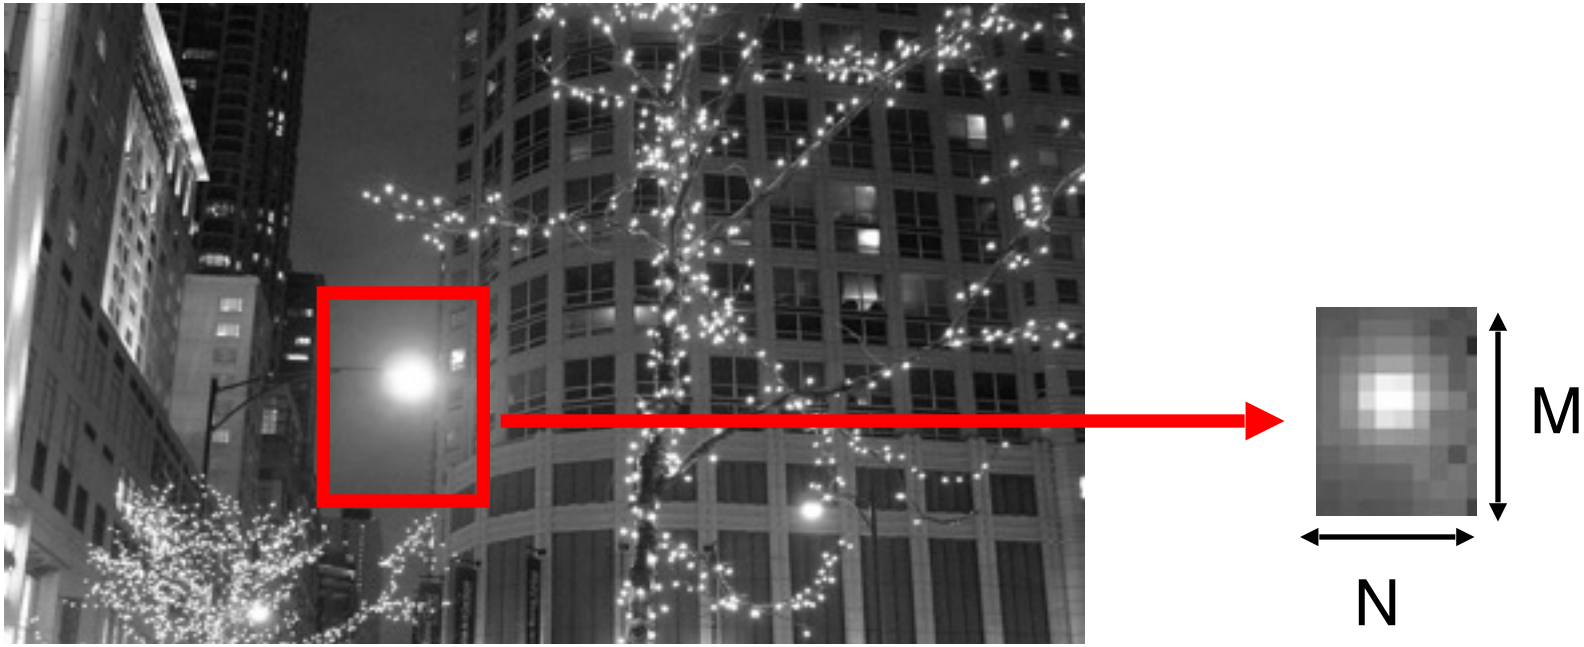

1 x NM vector of pixel intensities

w= []

Normalized vector of intensities

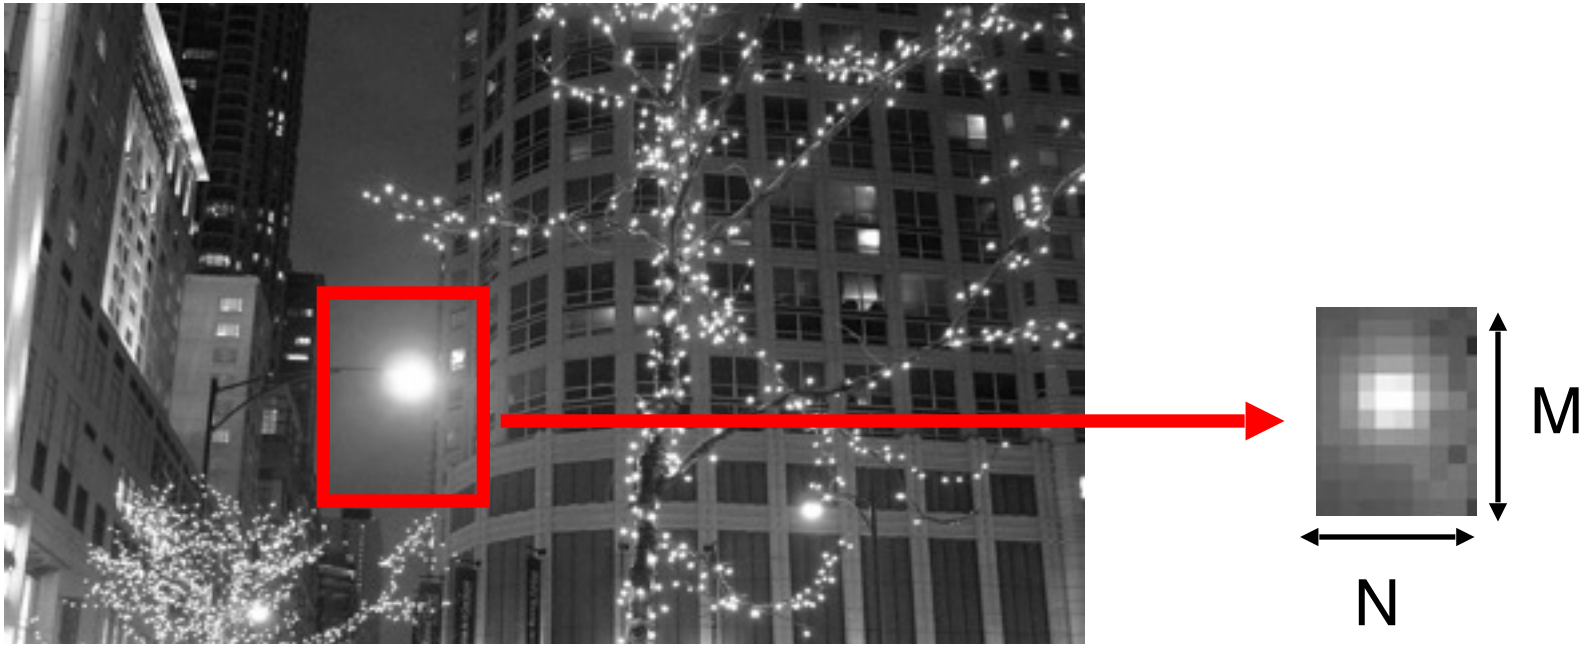

1 x NM vector of pixel intensities

w= []

$$w_n = \frac{(w - \overline{w})}{\|(w - \overline{w})\|}$$

Makes the descriptor invariant with respect to affine transformation of the illumination condition

[Eq. 13]

Illumination normalization

- *Affine intensity* change:

$$w \rightarrow w + b$$
$$\rightarrow a\,w + b$$

[Eq. 14]

$$w_n = \frac{(w - \overline{w})}{\|(w - \overline{w})\|}$$

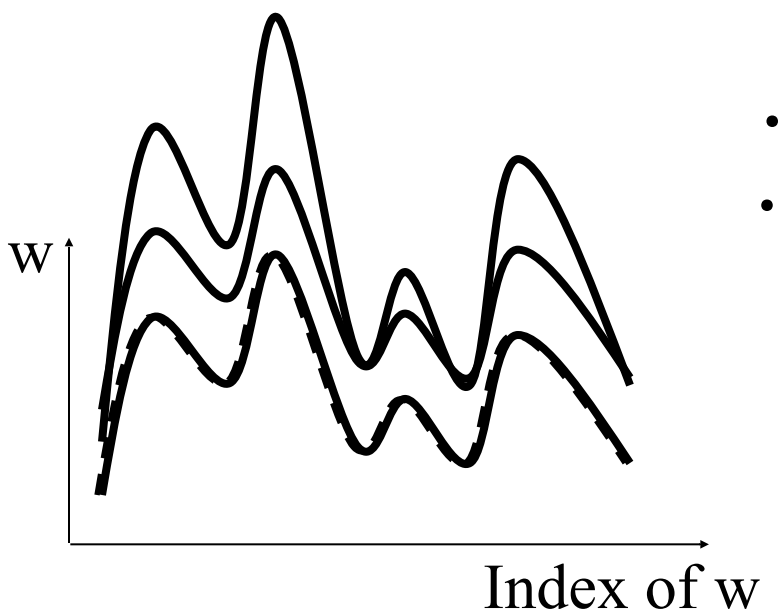

- Make each patch zero mean: remove b
- Make unit variance: remove a

Why can’t we just use this?

- Sensitive to small variation of:
    - location
    - Pose
    - Scale
    - intra-class variability
- Poorly distinctive

Sensitive to pose variations

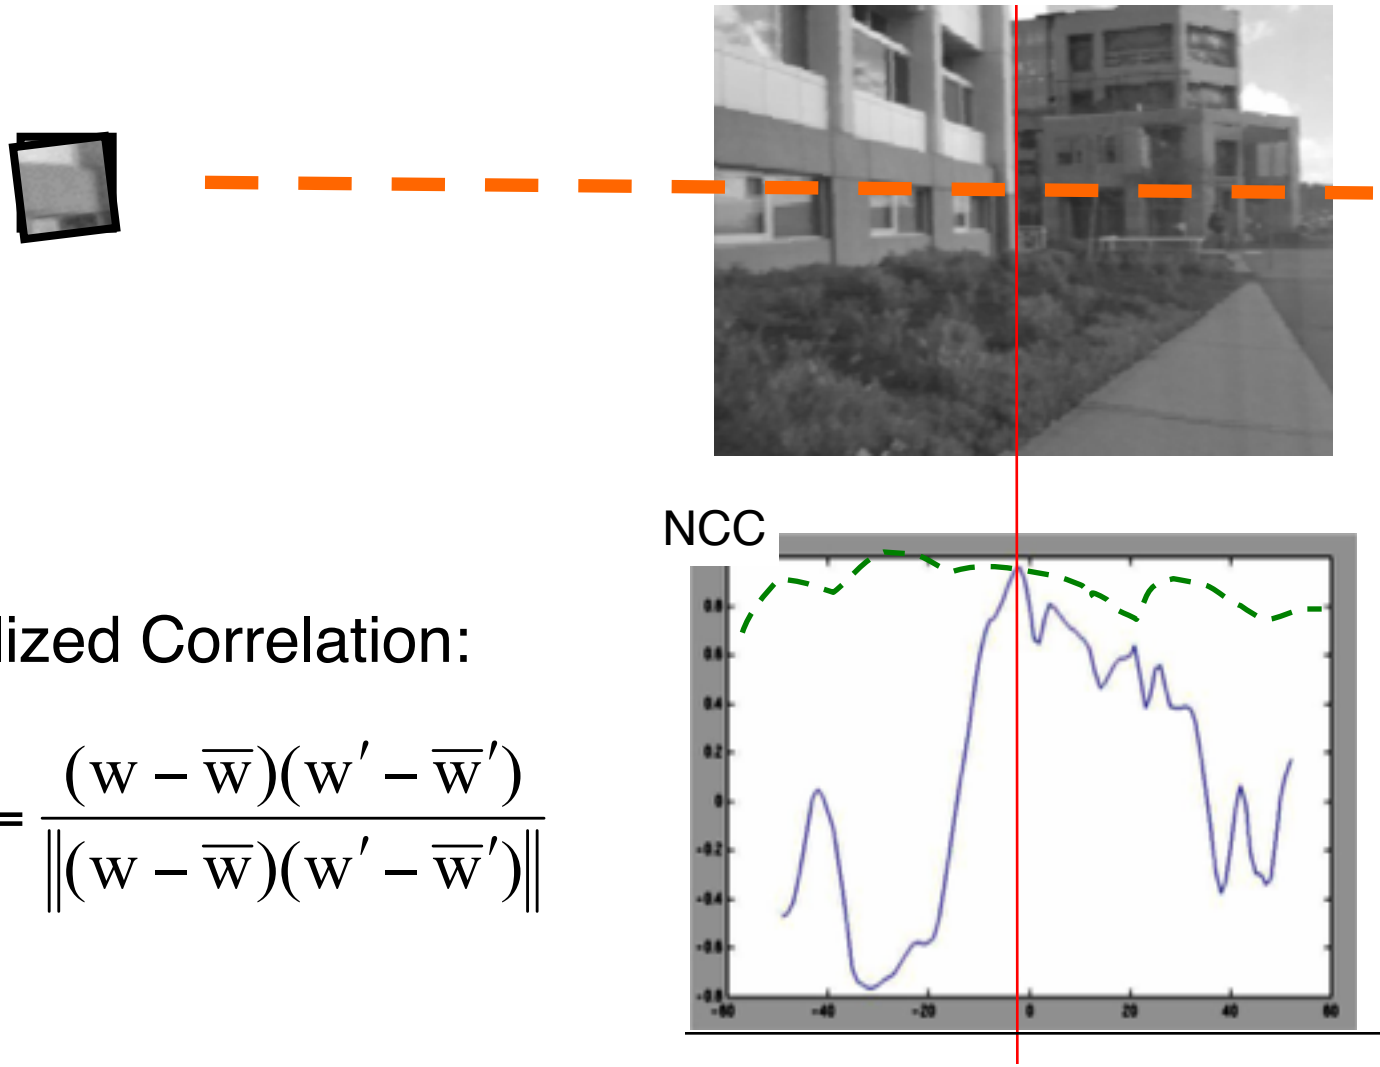

Normalized Correlation:

$$w_n \cdot w'_n = \frac{(w - \overline{w})(w' - \overline{w}')}{\|(w - \overline{w})(w' - \overline{w}')\|}$$

Properties of descriptors

Descriptor	Illumination	Pose	Intra-class variab.
PATCH	Good	Poor	Poor

Bank of filters

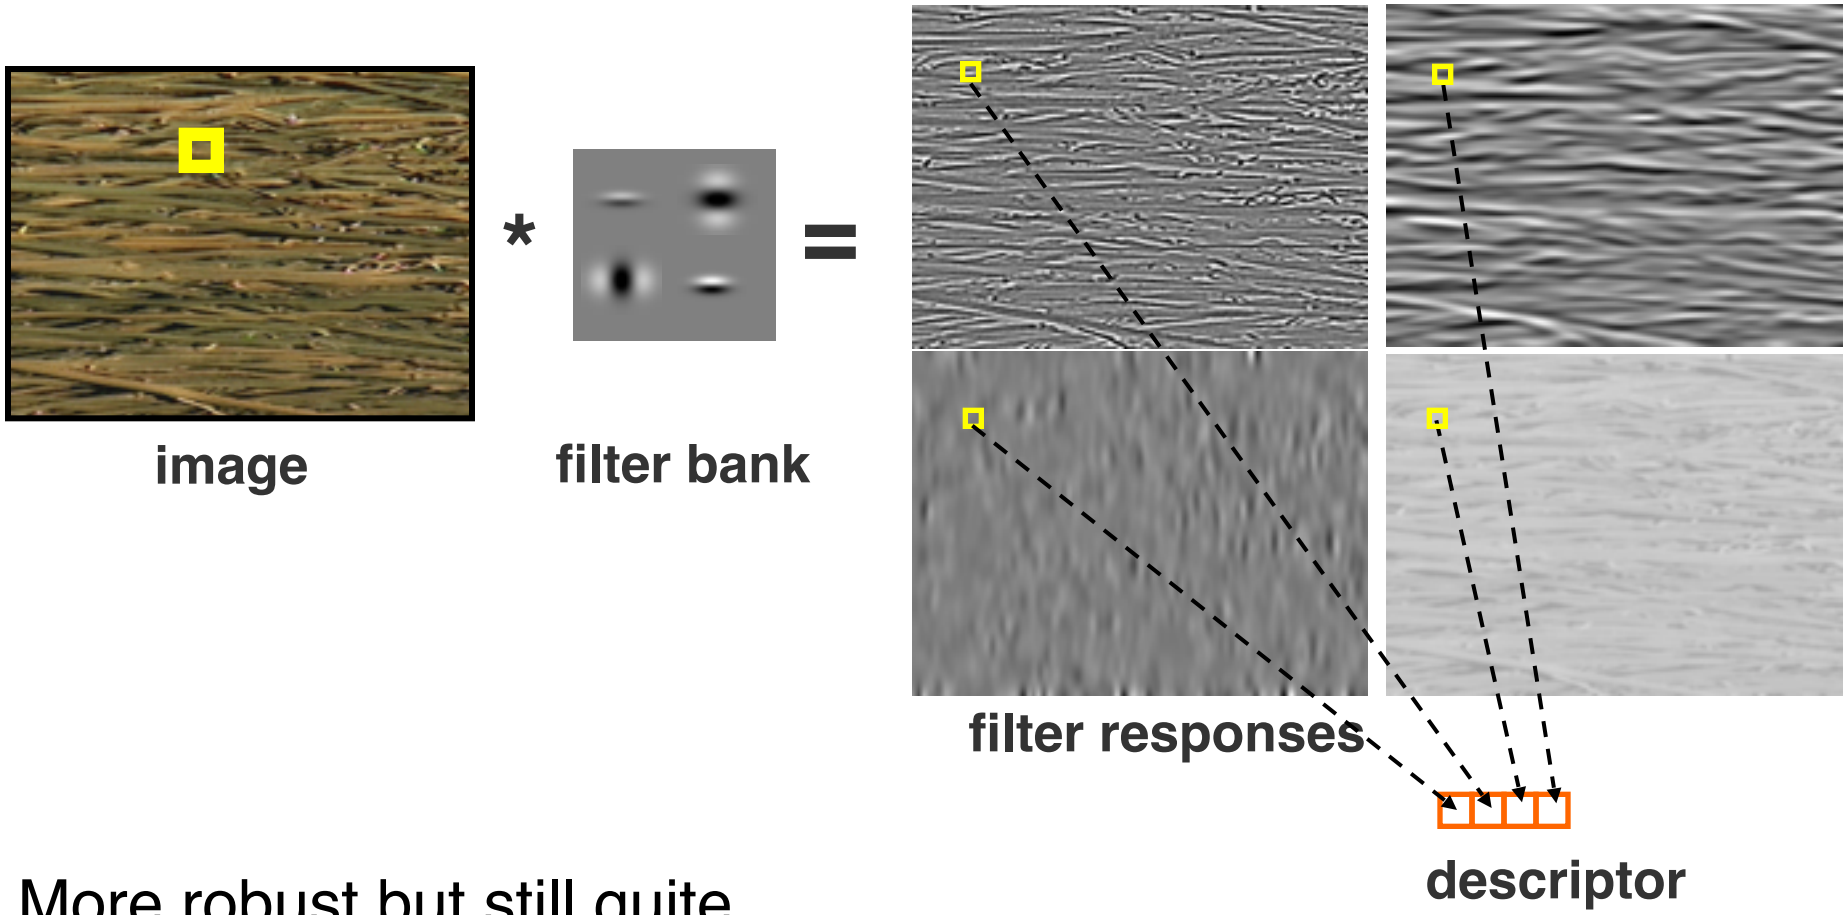

More robust but still quite sensitive to pose variations

http://people.csail.mit.edu/billf/papers/steerpaper91FreemanAdelson.pdf

A. Oliva and A. Torralba. Modeling the shape of the scene: a holistic representation of the spatial envelope. IJCV, 2001.

Properties of descriptors

Descriptor	Illumination	Pose	Intra-class variab.
PATCH	Good	Poor	Poor
FILTERS	Good	Medium	Medium

SIFT descriptor

David G. Lowe. **"Distinctive image features from scale-invariant keypoints."** *IJCV* 60 (2), 04

- Alternative representation for image regions
- Location and characteristic scale s given by DoG detector

Image window

SIFT descriptor

- Alternative representation for image regions
- Location and characteristic scale s given by DoG detector

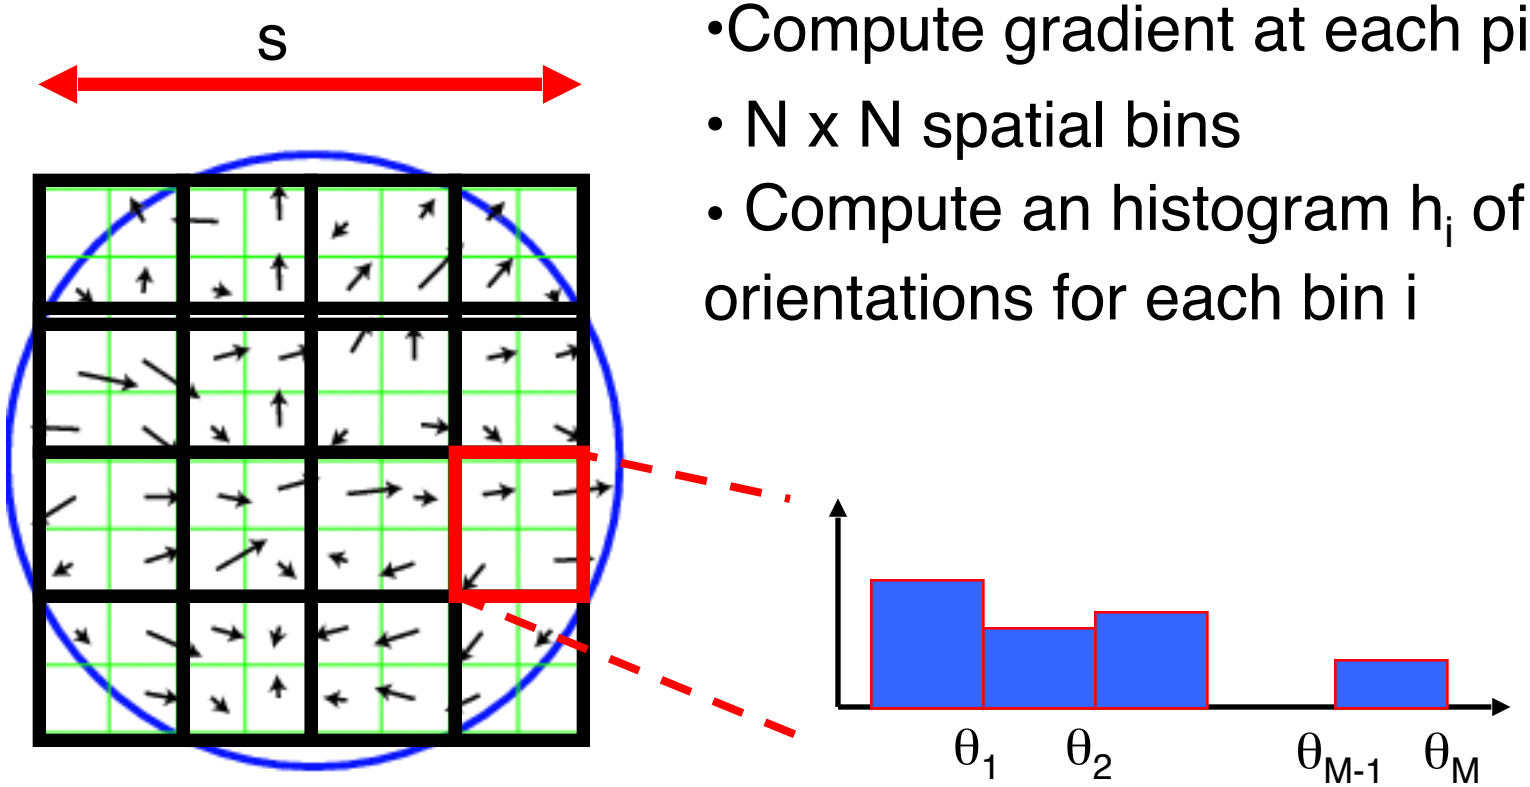

- Compute gradient at each pixel
- N x N spatial bins
- Compute an histogram h_i of M orientations for each bin i

SIFT descriptor

- Alternative representation for image regions
- Location and characteristic scale s given by DoG detector

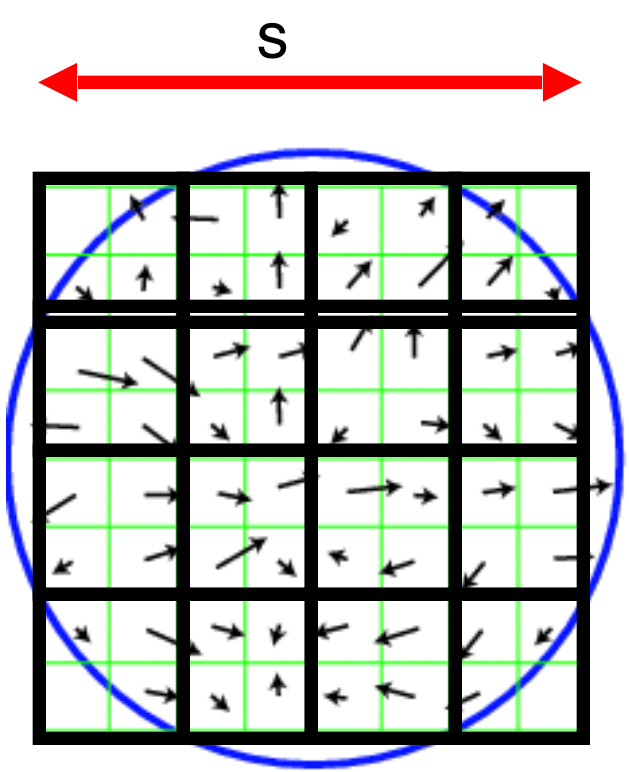

- Compute gradient at each pixel
- N x N spatial bins
- Compute an histogram h_i of M orientations for each bin i
- Concatenate h_i for i=1 to N^2 to form a $1xMN^2$ vector H

SIFT descriptor

- Alternative representation for image regions
- Location and characteristic scale s given by DoG detector

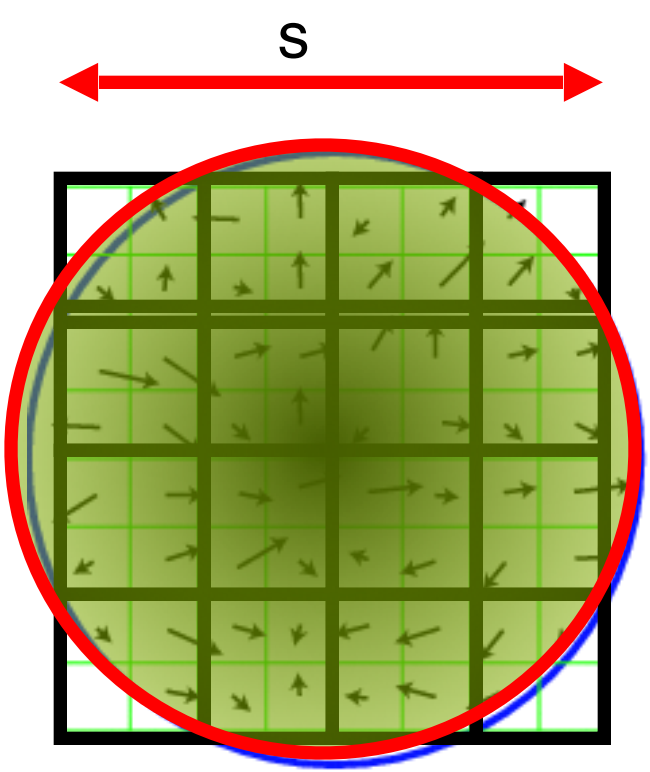

- Compute gradient at each pixel
- N x N spatial bins
- Compute an histogram h_i of M orientations for each bin i
- Concatenate h_i for i=1 to N^2 to form a $1 \times MN^2$ vector H
- Normalize to unit norm
- Gaussian center-weighting

Typically M = 8; N= 4
H = 1 x 128 descriptor

SIFT descriptor

- Robust w.r.t. small variation in:
  - Illumination (thanks to gradient & normalization)
  - Pose (small affine variation thanks to orientation histogram)
  - Scale (scale is fixed by DOG)
  - Intra-class variability (small variations thanks to histograms)

Rotational invariance

- Find dominant orientation by building a orientation histogram
- Rotate all orientations by the dominant orientation

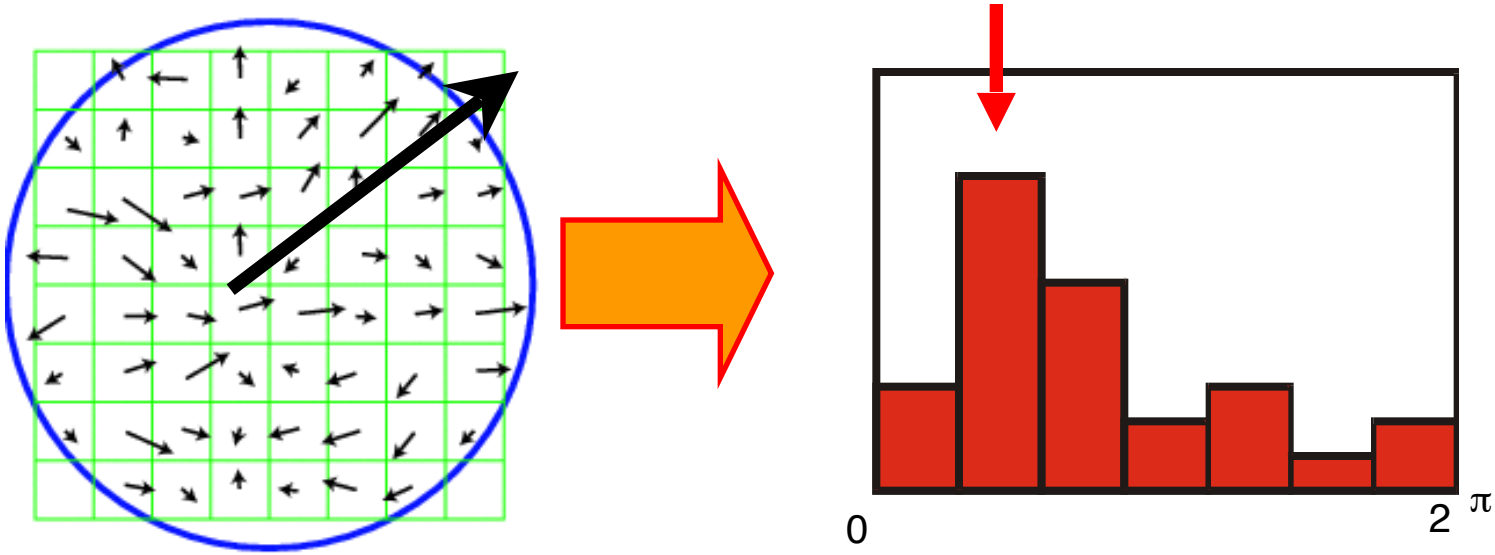

This makes the SIFT descriptor rotational invariant

Properties of descriptors

Descriptor	Illumination	Pose	Intra-class variab.
PATCH	Good	Poor	Poor
FILTERS	Good	Medium	Medium
SIFT	Good	Good	Medium

HoG = Histogram of Oriented Gradients

Navneet Dalal and Bill Triggs, Histograms of Oriented Gradients for Human Detection, CVPR05

- Like SIFT, but…
  - Sampled on a dense, regular grid around the object
  - Gradients are contrast normalized in overlapping blocks

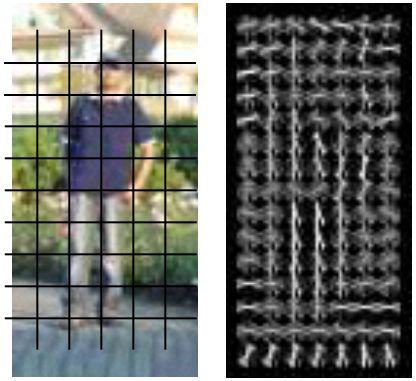

Shape context descriptor

Belongie et al. 2002

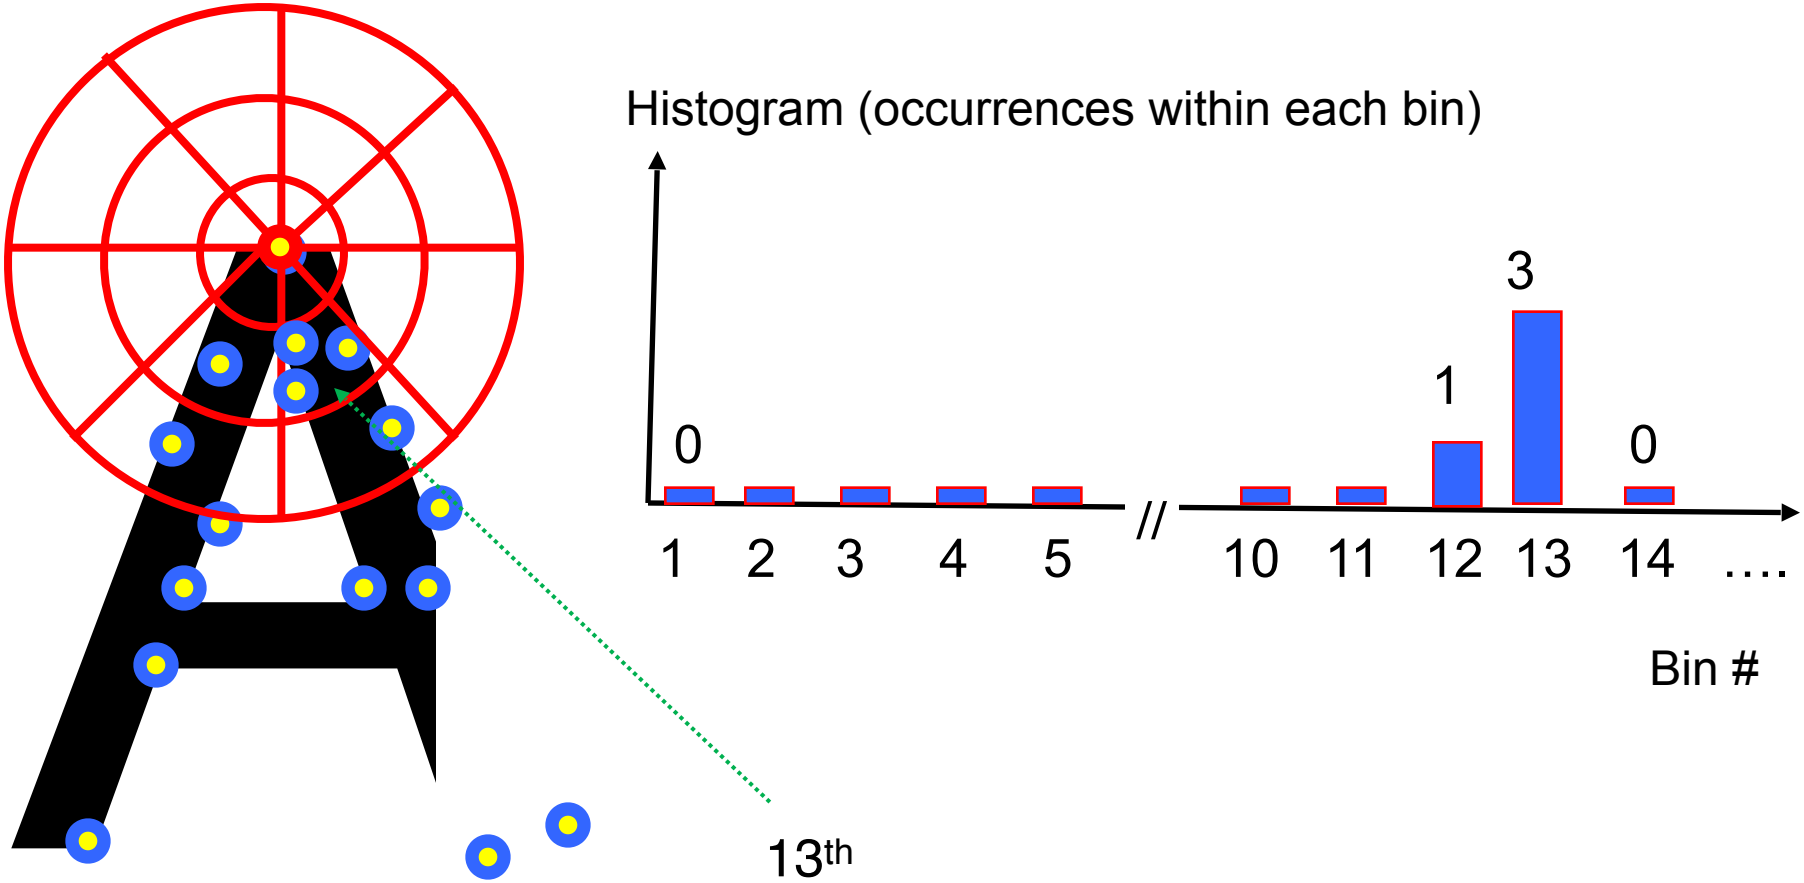

Shape context descriptor

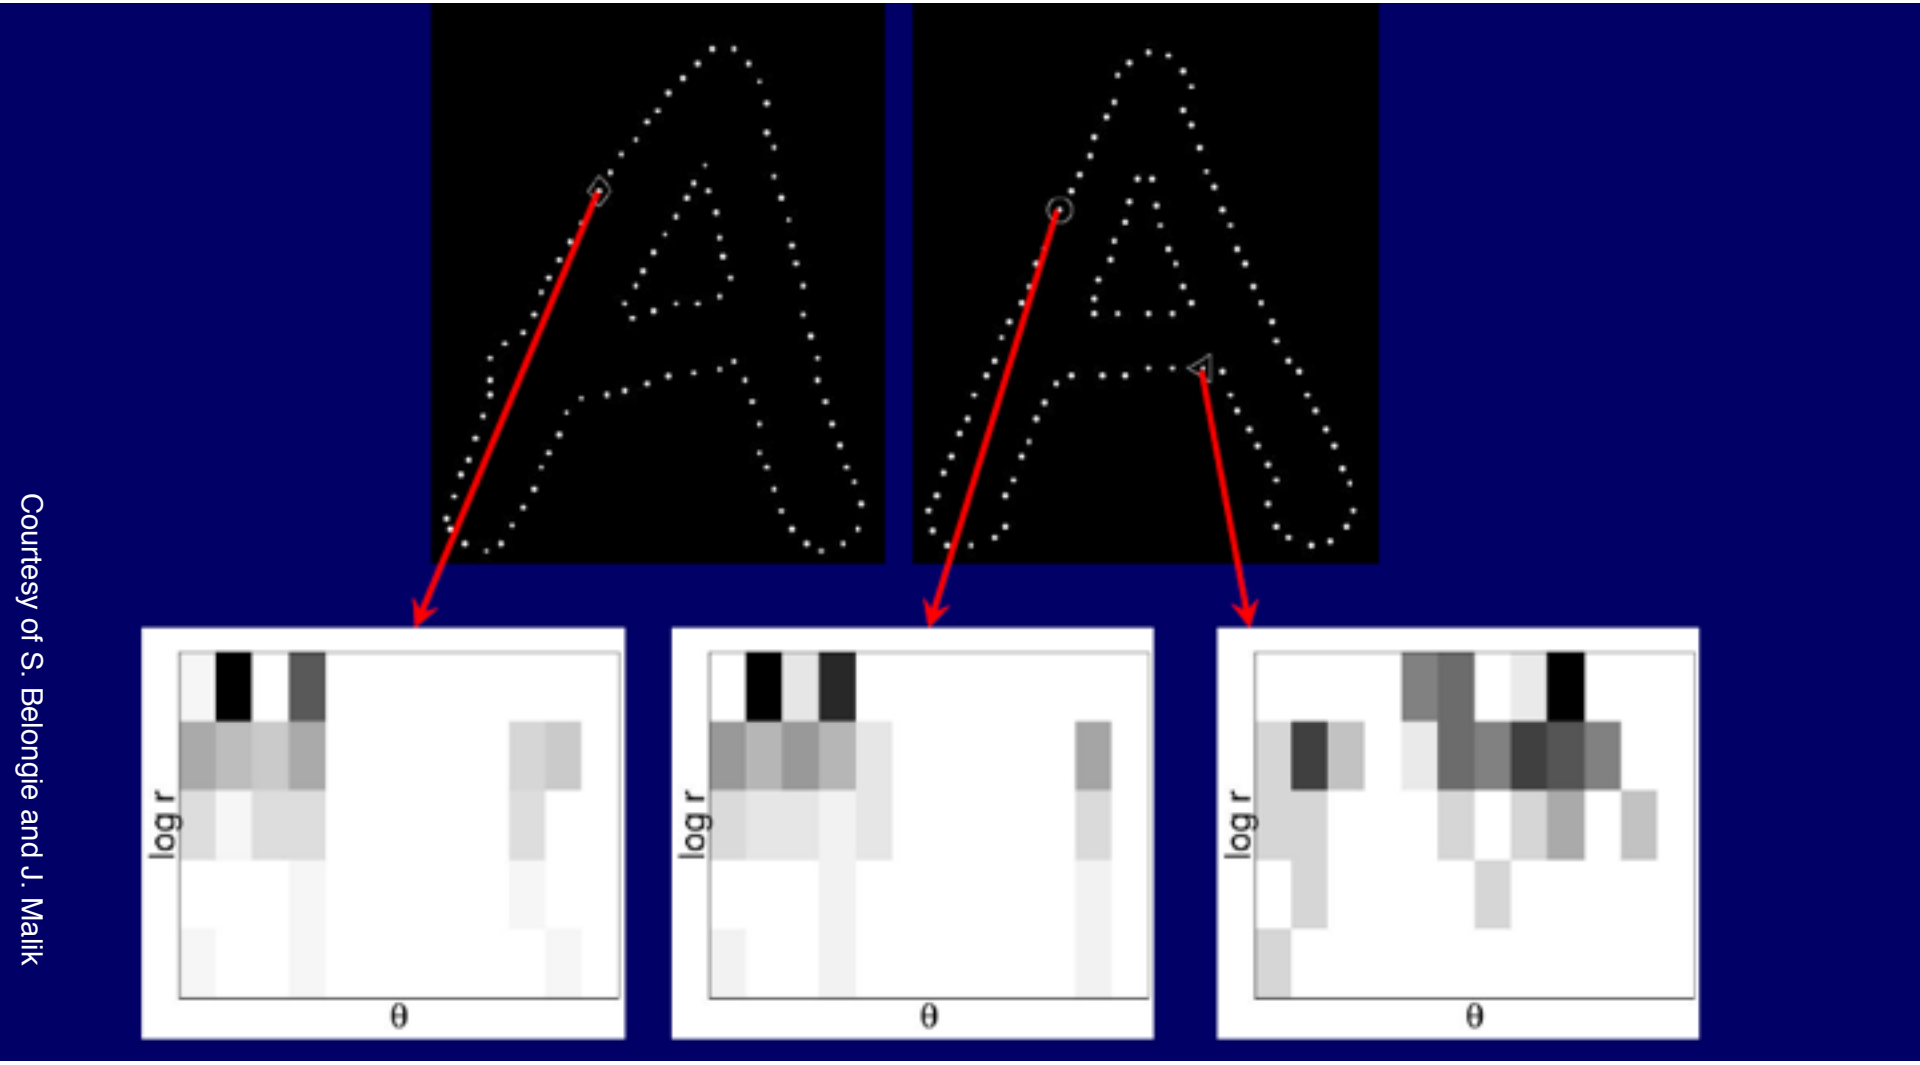

descriptor 1 descriptor 2 descriptor 3

Courtesy of S. Belongie and J. Malik

Other detectors/descriptors

- **HOG: Histogram of oriented gradients**

  Dalal & Triggs, 2005

- **SURF: Speeded Up Robust Features**

  Herbert Bay, Andreas Ess, Tinne Tuytelaars, Luc Van Gool, "SURF: Speeded Up Robust Features", Computer Vision and Image Understanding (CVIU), Vol. 110, No. 3, pp. 346--359, 2008

- **FAST (corner detector)**

  Rosten. Machine Learning for High-speed Corner Detection, 2006.

- **ORB: an efficient alternative to SIFT or SURF**

  Ethan Rublee, Vincent Rabaud, Kurt Konolige, Gary R. Bradski: ORB: An efficient alternative to SIFT or SURF. ICCV 2011

- **Fast Retina Key- point (FREAK)**

  A. Alahi, R. Ortiz, and P. Vandergheynst. FREAK: Fast Retina Keypoint. In IEEE Conference on Computer Vision and Pattern Recognition, 2012. CVPR 2012 Open Source Award Winner.

Next lecture:

Image Classification by Deep Networks by Ronan Collobert (Facebook)